

Recessed Spotlight

Norms: EN 60598-1, EN 60598-2-1, EN60598-2-2

Product information



| | |
|---------------------------|-------------------------------------|
| Product number: | ALR70 - 24 |
| Input Voltage (v): | 220-240V AC |
| Dimming: | On/Off, Triac, 1-10V, DALI |
| Light source: | COB LED |
| Luminaire Lifetime: | 50.000h (L80-B10, Ta25° C) |
| Rotation Angle (degree): | 355 |
| Tilting Angle (degree): | 30 |
| IP Rating: | 20 |
| Working Temperature (° C) | -5 ~ +30 |
| Storage Temperature (° C) | -20 ~ +50 |
| Material: | Aluminium |
| Fitting Colors: | 9016 Sandy White / 9017 Sandy Black |








Packaging information

| | |
|-------------------------------|-------------|
| N.W. lamp (Kg): | 0.76 |
| G.W. Carton (Kg): | 18 |
| Master carton dimensions(mm): | 720x295x328 |
| Quantity per carton(PCS): | 20 |



Honeycomb ring Oval diffuser Diffuser Anti-glare ring

| Beam | Watt | CRI | Luminous | CCT | Code |
|---|------|-----|-----------|-------|-------------------|
| 16  | 24W | 90 | 2012.1 lm | 4000K | ALR70S-NC24G40-S |
| | | | 1898.2 lm | 3000K | ALR70S-NC24G30-S |
| | | | 1765.3 lm | 2700K | ALR70S-NC24G27-S |
| 21  | 24W | 90 | 2028.8 lm | 4000K | ALR70S-NC24G40-M |
| | | | 1914.0 lm | 3000K | ALR70S-NC24G30-M |
| | | | 1780.0 lm | 2700K | ALR70S-NC24G27-M |
| 34  | 24W | 90 | 1911.4 lm | 4000K | ALR70S-NC24G40-F |
| | | | 1803.2 lm | 3000K | ALR70S-NC24G30-F |
| | | | 1676.9 lm | 2700K | ALR70S-NC24G27-F |
| 45  | 24W | 90 | 1926.9 lm | 4000K | ALR70S-NC24G40-WF |
| | | | 1817.8 lm | 3000K | ALR70S-NC24G30-WF |
| | | | 1690.6 lm | 2700K | ALR70S-NC24G27-WF |

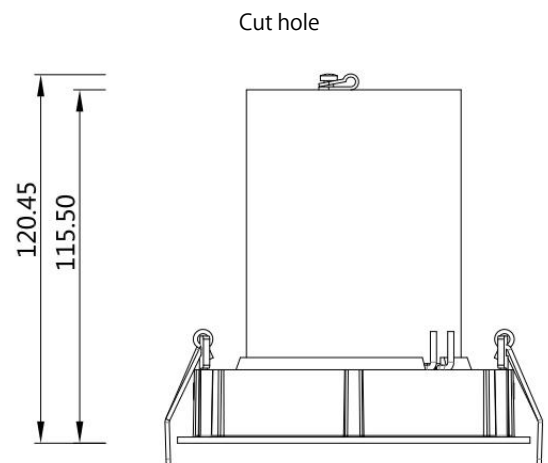

- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

Code composition: ALR 70 S - N C 24 G30 - S - B- L01

| | | | | | | | | | |
|------------------|---------|-------------|--|------------|--------|---|---------------------------------------|----------------|---|
| ① Product series | ② Model | ③ App types | ④ Dimming type | ⑤ COB type | ⑥ Watt | ⑦ LED Kelvin & CRI | ⑧ Optical angle | ⑨ Finishes | ⑩ Accessories |
| ALR | 70 | S Spotlight | N No dimming T Triac dimming V 1-10V dimming D DALI dimming | C COB | 24W | H27 2700 >95 S G30 3000 >90 M E40 4000 >80 F C50 5000 >70 WF | Spot Medium Flood Wide Flood | White Black | L01 Honeycomb L02 Oval diffuser L03 Diffuser L04 Anti-glare ring |