


Combolite Series

BL17-15W

Reflector



125-130

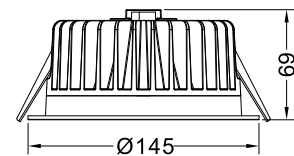

Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	350mA (35-37V)
Rated life:	>50,000 hours
Operating temperature:	-20℃~40℃
Storage temperature:	-30℃~60℃
Certificate:	
Dimmability:	Dimmable Optional
Weight:	0.45KG


Ordering Information:

⊕White+ Gray


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
15W	>80	▲ 60°	1760 lm	3000K	⊕	BL171-15W-830-W-60
			1780 lm	4000K	⊕	BL171-15W-840-W-60
	>90	▲ 60°	1430 lm	3000K	⊕	BL171-15W-930-W-60
			1620 lm	4000K	⊕	BL171-15W-940-W-60

Technical Data test pattern


CRI80 60°

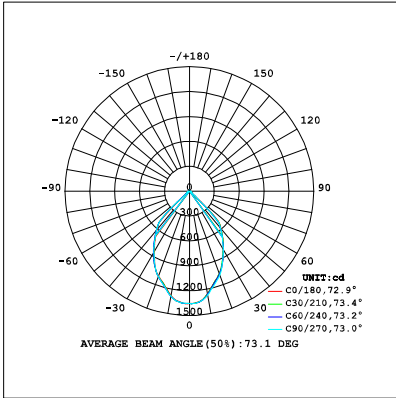


3000K

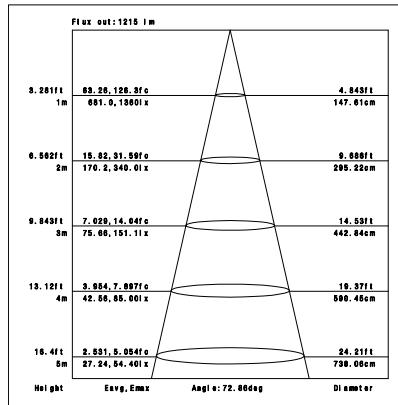


4000K

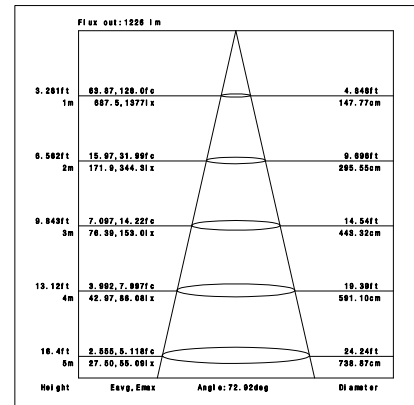


CRI90 60°

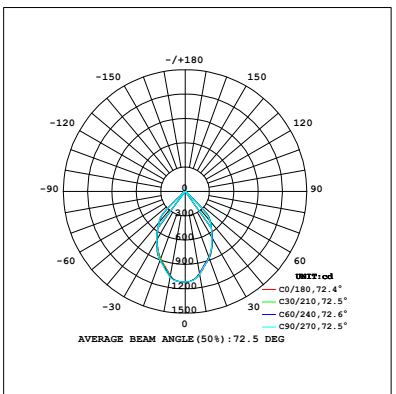

3000K

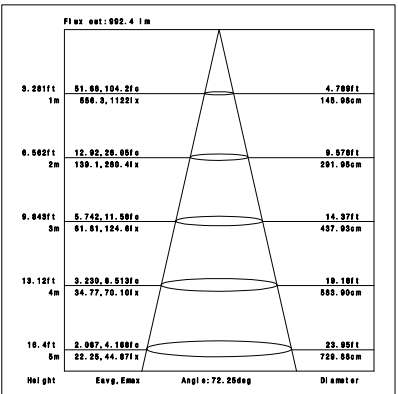


4000K

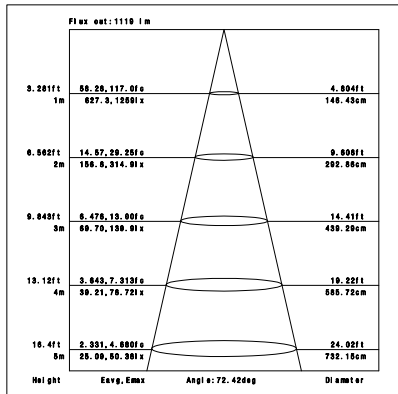


Installation instruction


1, Cut Hole

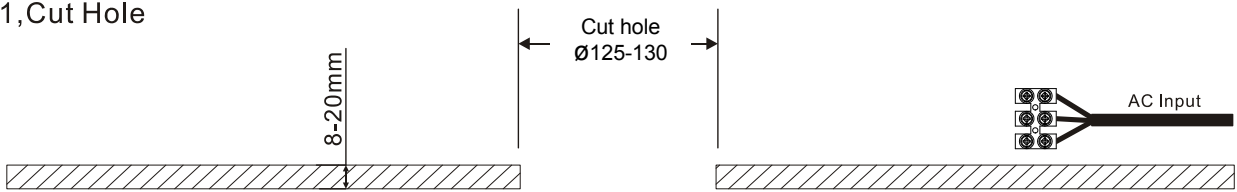


2, Connect Wire

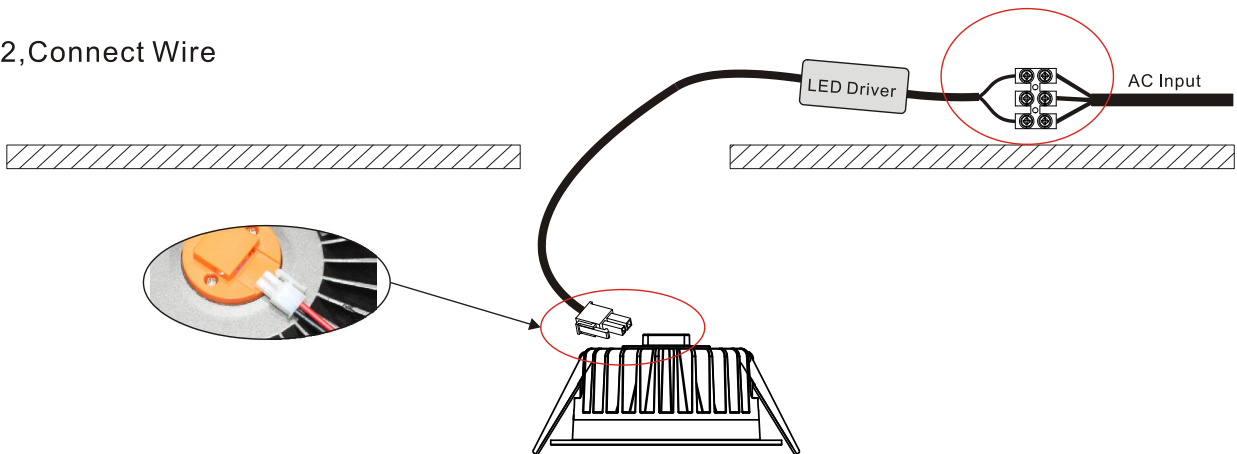

3, Fit the luminaire in the hole

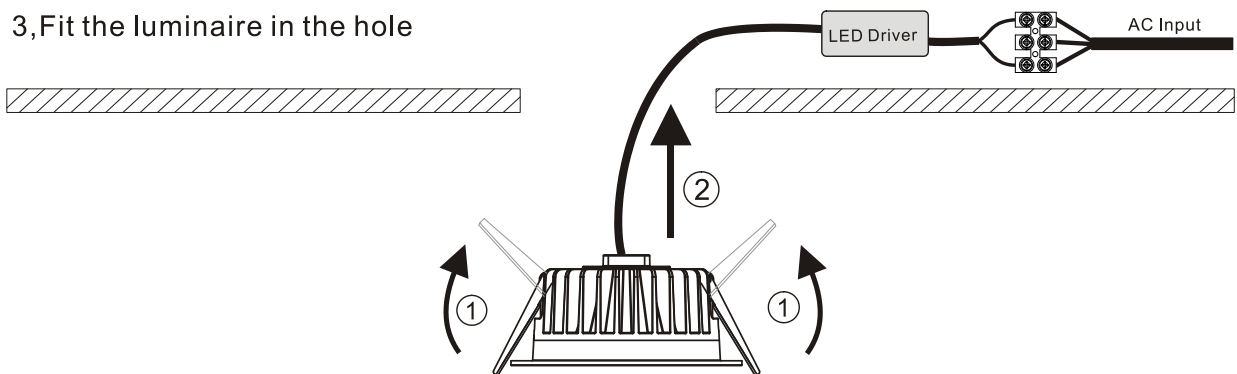

4, Finish

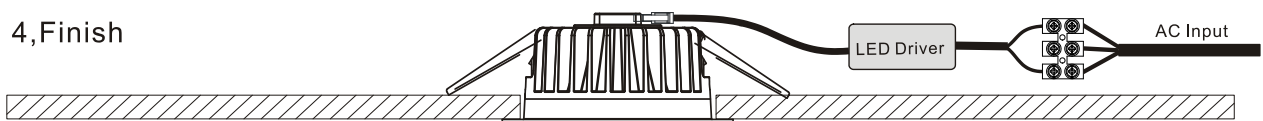

Packaging:




Box

L170*W170*H80mm

1pc/box

GW: 0.7kg/box

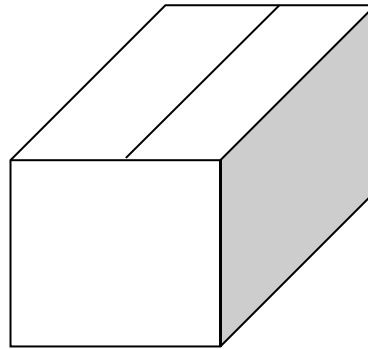

Outer carton

L680*W360*H370mm

32pcs/CTN

GW: 25kg/carton

Product naming system

BL (-X) XX X (H) - XW - X XX - X- XX

