


veraLite Series

DL27-15W

Optical Lens



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
Current:	350mA
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Weight:	
Package(mm):	







Ordering Information:

○ White

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
15W	>80	▲ 20°	1570lm	3000K	○	DL271-15W-830-W-20
			1638lm	4000K	○	DL271-15W-840-W-20
		▲ 24°	1568lm	3000K	○	DL271-15W-830-W-24
			1640 lm	4000K	○	DL271-15W-840-W-24
		▲ 32°	1565 lm	3000K	○	DL271-15W-830-W-32
			1625 lm	4000K	○	DL271-15W-830-B-32
	>90	▲ 20°	1325lm	3000K	○	DL271-15W-830-W-20
			1410lm	4000K	○	DL271-15W-840-W-20
		▲ 24°	1340lm	3000K	○	DL271-15W-830-W-24
			1410 lm	4000K	○	DL271-15W-840-W-24
		▲ 32°	1330 lm	3000K	○	DL271-15W-830-W-32
			1425 lm	4000K	○	DL271-15W-830-B-32


Technical Data test pattern

15W	CRI>80				CRI>90					
	LED		Luminaire		LED		Luminaire			
Power	6.1W		15W		6.1W		15W			
Current	180mA		350mA		180mA		350mA			
Flux	886lm	924lm	948lm	1570lm	1640lm	791lm	805lm	1340lm	1425lm	
CCT	2700K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	
Color tolerance	3 SDCM				3 SDCM					
Service life	>50,000Hrs		>50,000Hrs		>50000Hrs		>50,000Hrs			
Beam Angle	120°		20°\24°\32°		120°		20°\24°\32°			
Typical Efficiency			85%				85%			
Efficacy (lm/W)	145	151	155	104	109	129	132	89	95	

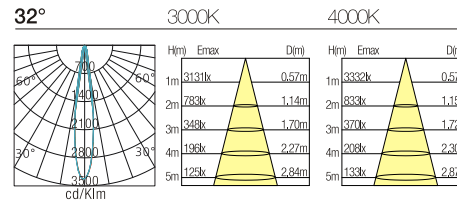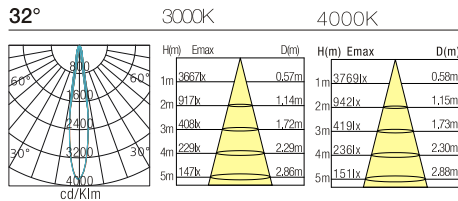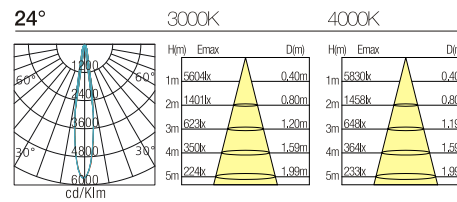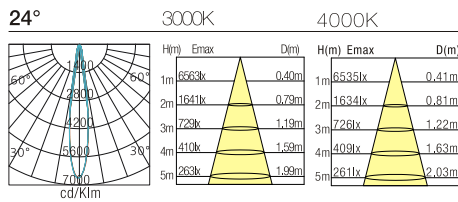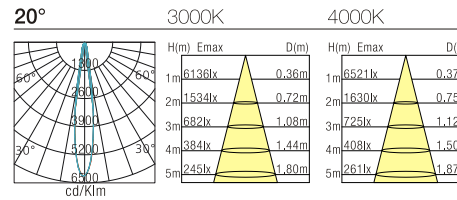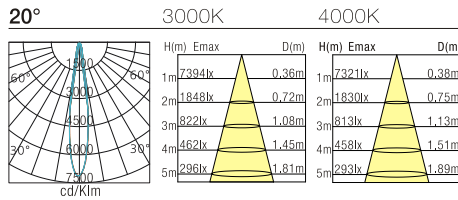


Installation Instruction


1, Cut Hole

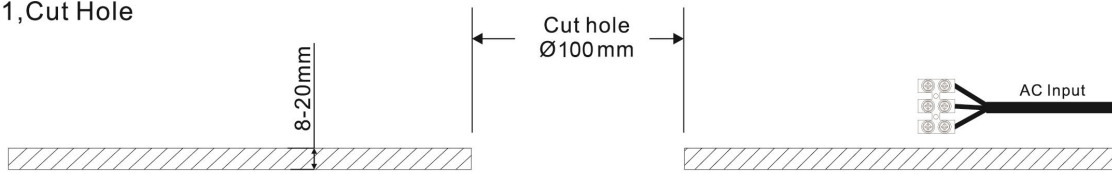


2, Connect Wire

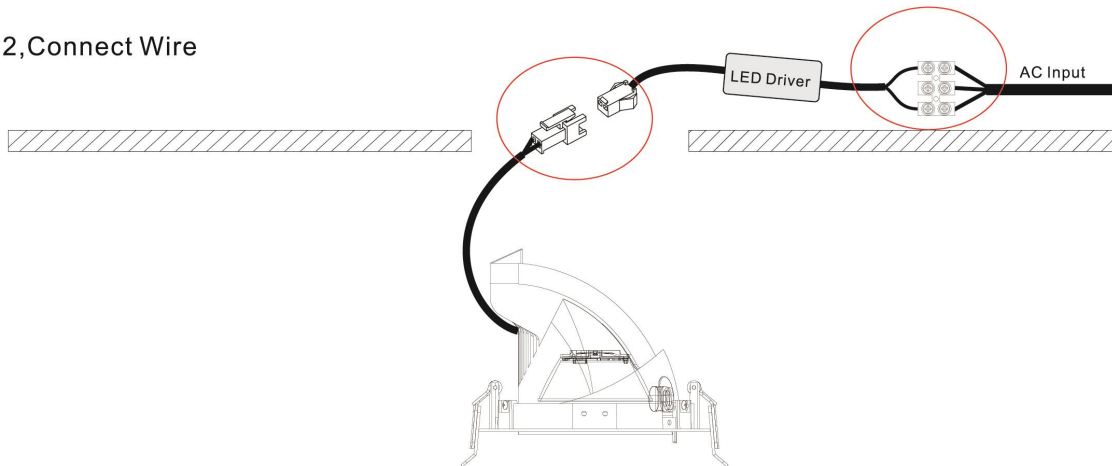

3, Fit the luminaire in the hole

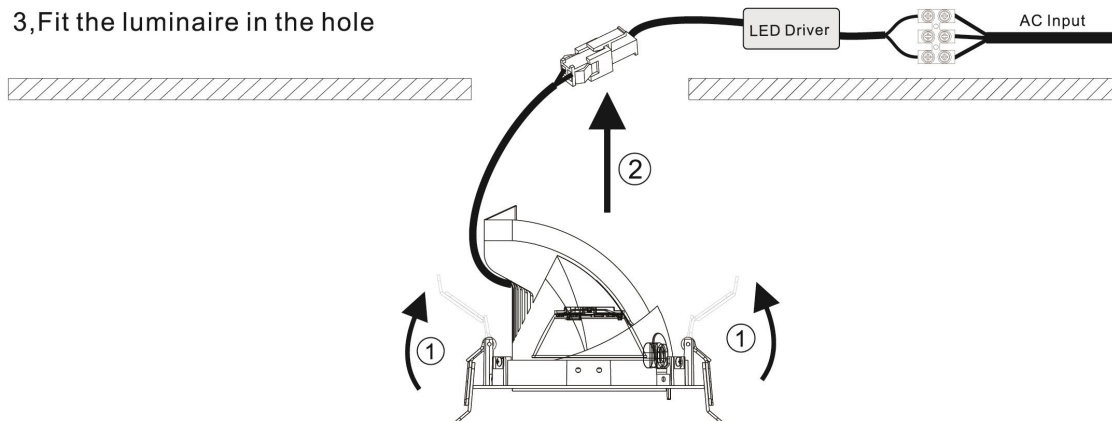

4, Finish

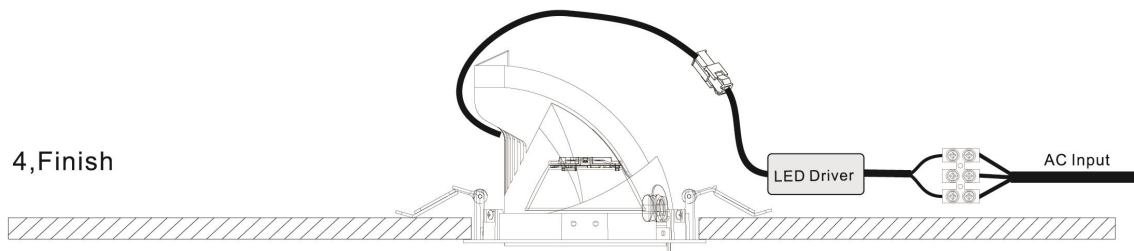

Product Nomenclature

DL (X) XX X (H) – X – X XX – X- XX

