


FLOW.IT Series


DL31-M-20W

optical lens

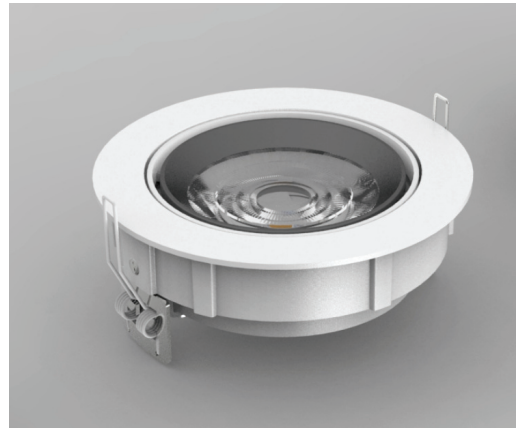

Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	500mA, 35-37V
Beam Angle:	15°/20°/36°/48°/60°
Life Time:	> 50,000h - L80 - B10 (Ta 25° C)
Operating temperature:	-20°C~40°C
Certificate:	CE/RoHS
Weight:	0.45kg

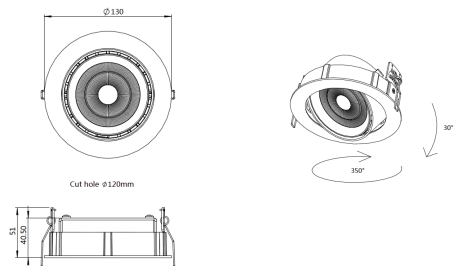


Ordering Information:

○ White ● Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
20W	>80	▲ 15°	1910 lm	3000K	○	DL311-20W-830-W-15-M
			2102 lm	4000K	●	DL311-20W-830-B-15-M
		▲ 20°	1778 lm	3000K	○	DL311-20W-830-W-20-M
			1962 lm	4000K	●	DL311-20W-830-B-20-M
		▲ 36°	1870 lm	3000K	○	DL311-20W-840-W-36-M
			2086 lm	4000K	●	DL311-20W-840-B-36-M
	>90	▲ 15°	1566 lm	3000K	○	DL311-20W-930-W-15-M
			1766 lm	3000K	●	DL311-20W-930-B-15-M
		▲ 20°	1766 lm	3000K	○	DL311-20W-930-W-20-M
			1672 lm	3000K	●	DL311-20W-930-B-20-M
		▲ 36°	1672 lm	3000K	○	DL311-20W-930-W-36-M
			1672 lm	3000K	●	DL311-20W-930-B-36-M

Technical Data test pattern


CRI80 15°

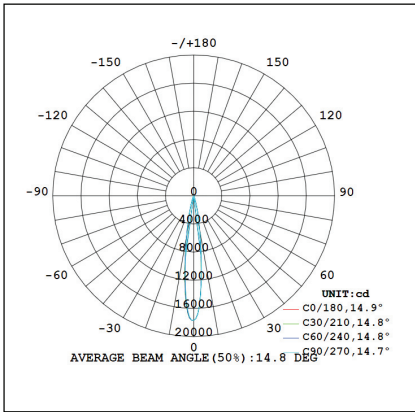


3000K

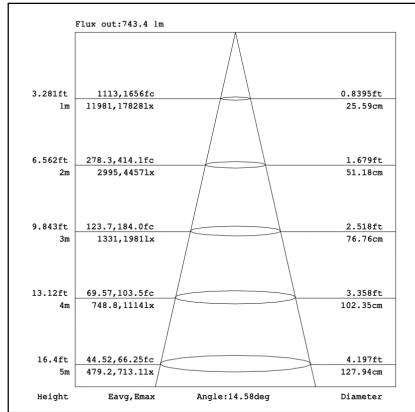


4000K

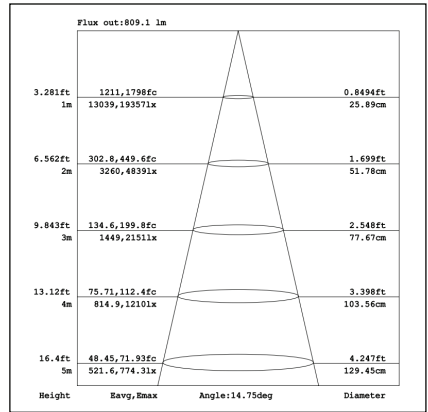


CRI80 20°

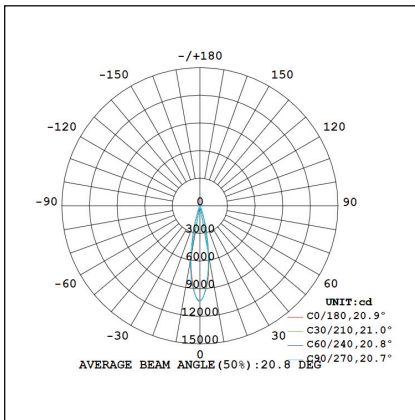


3000K

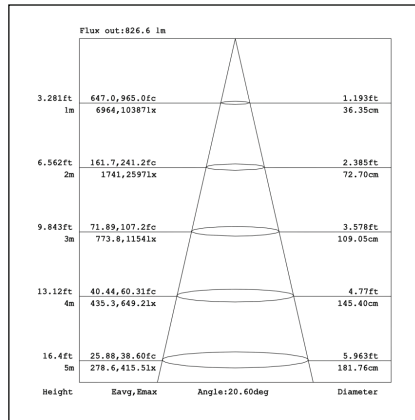


4000K

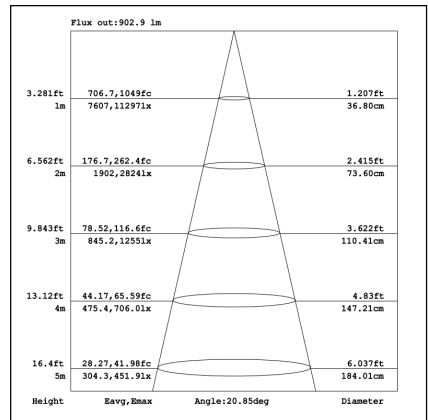


CRI80 36°

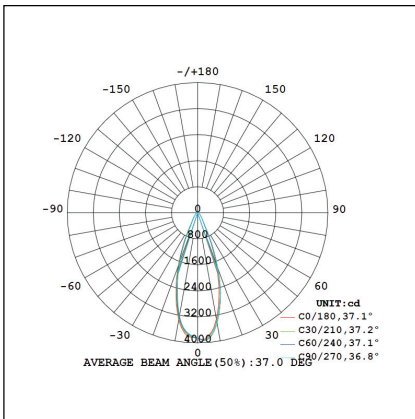


3000K

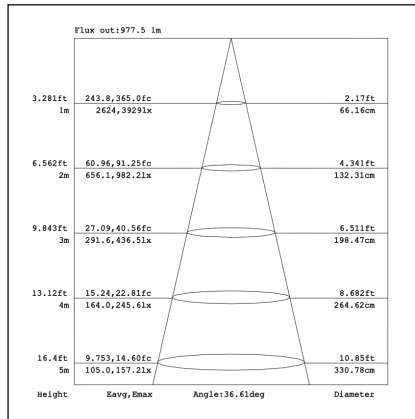


4000K

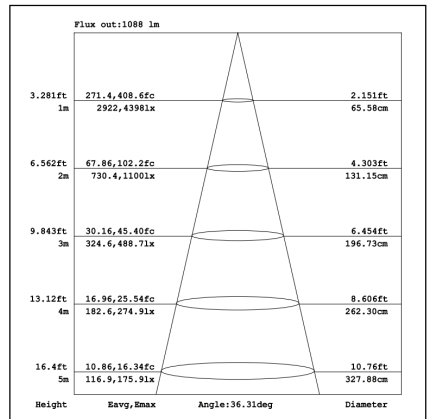


CRI80 48°

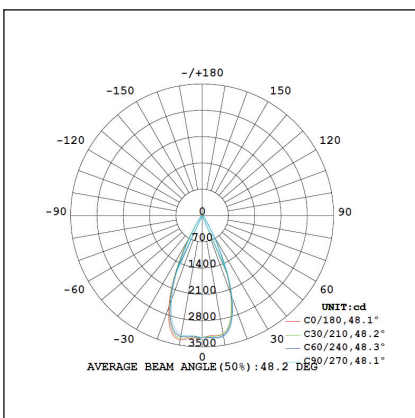


3000K

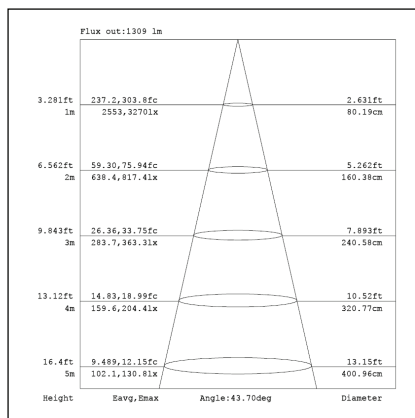


4000K

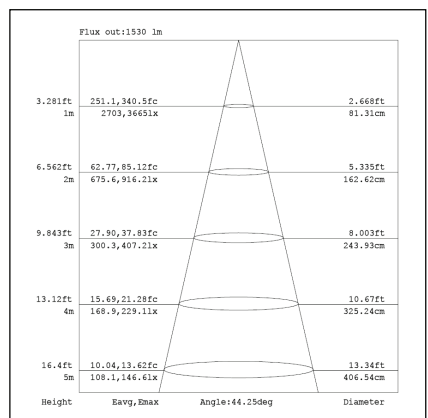


CRI80 60°

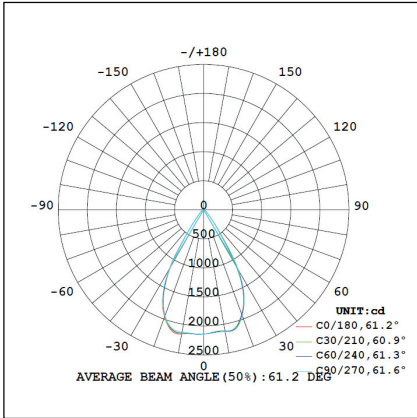


3000K

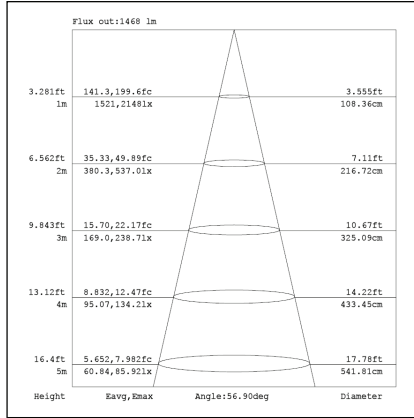


4000K

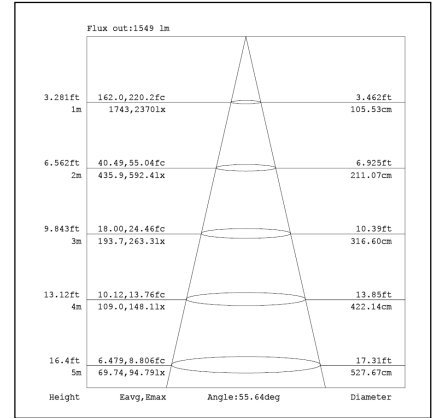


3000K

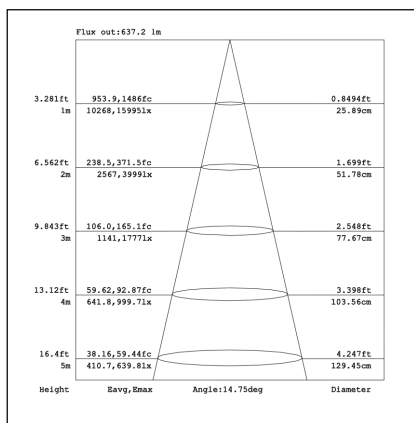


4000K

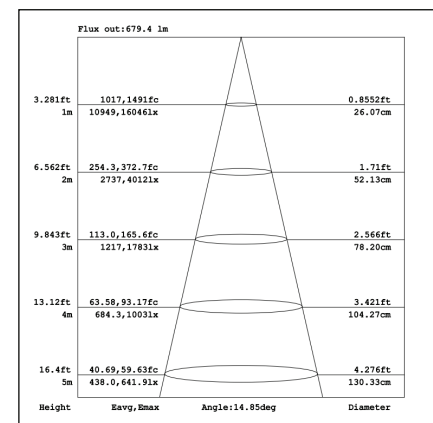


3000K

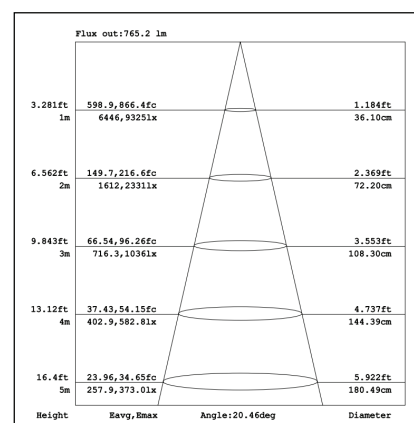


4000K

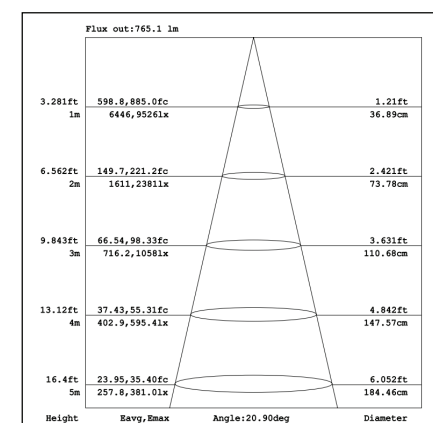


3000K

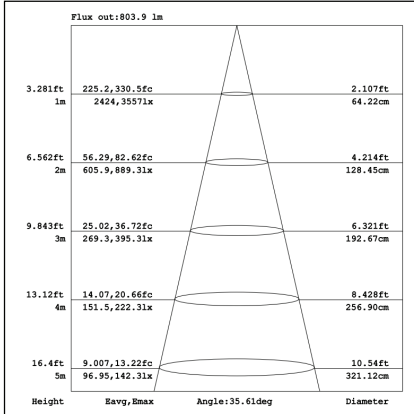


4000K

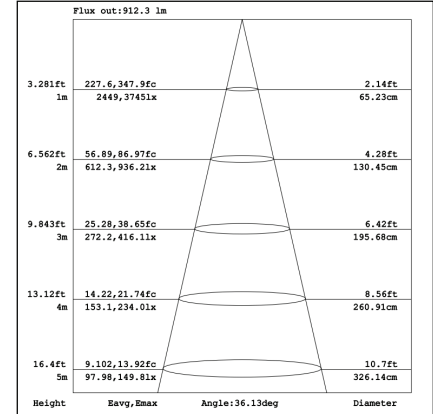


CRI90 15°

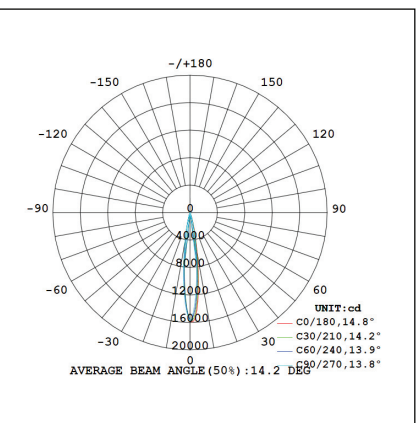

CRI90 20°

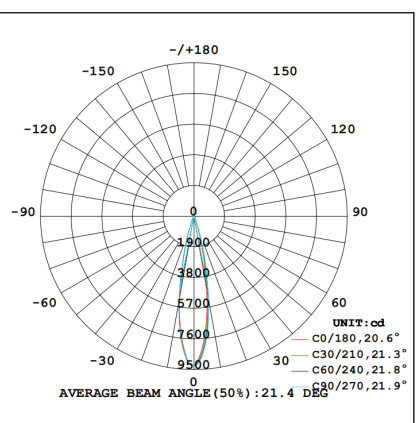


CRI90 36°

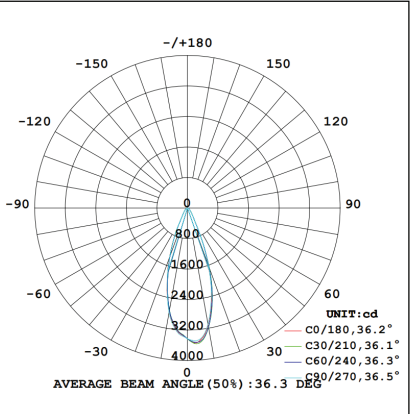


Installation instruction


1,Cut Hole

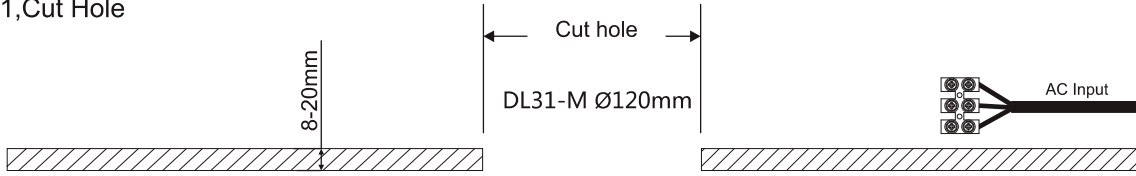


2,Connect Wire

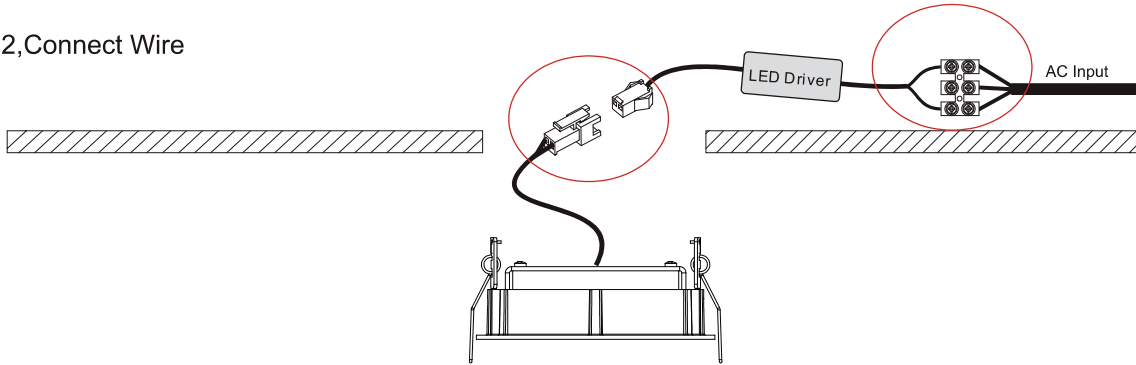


3,Fit the luminaire in the hole

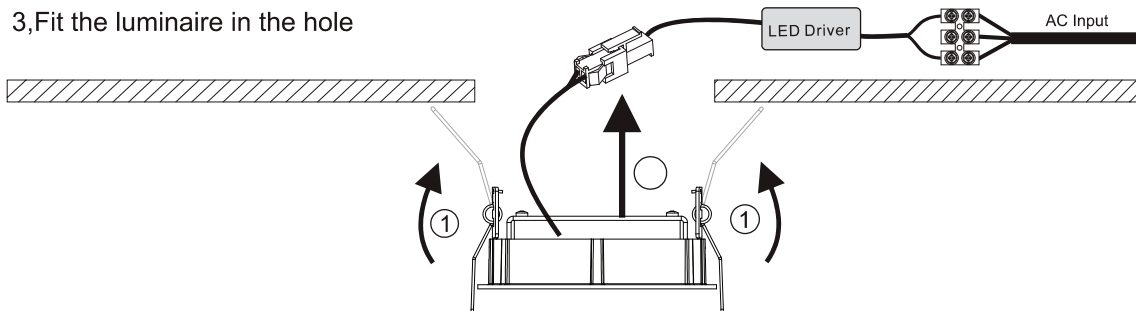


4,Finish

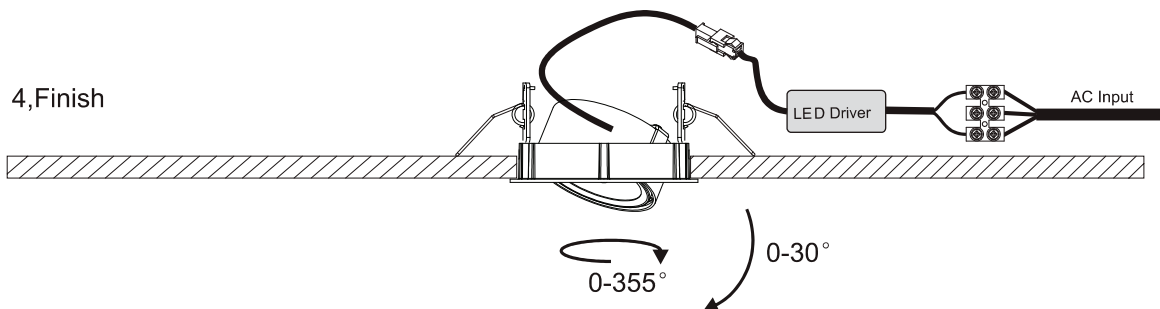

Packaging:



Box
L135*W135*H80mm
1pc/box
GW: 0.55kg/box



Outer carton
L560*W300*H340mm
32pcs/CTN
GW: 18.5kg/carton