


IMS Series

**IMS-BL150-20W/28W**

Reflector+Lens

Technical Parameters:

Name	Parameters	
Light source:	COB	
Input Voltage:	AC220~240V 50/60Hz	
Current: (Adjustable)	500mA	700mA
	20W	28W
Rated life:	>50,000 hours	
Operating temperature:	-20°C~40°C	
Storage temperature:	-30°C~60°C	
Certificate:		
Dimmability:	Dimmable Optional	

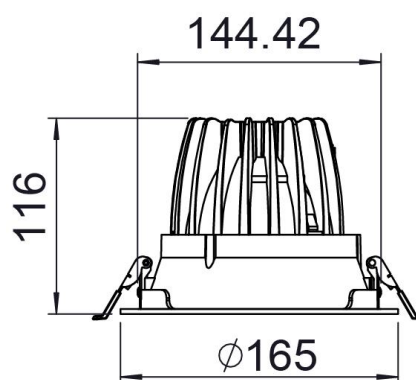

Ordering Information:


○ Silver gray

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number		
20W	80	▲ 15°	2217 lm	3000K	○	IMS-BL150-20W-830-S-15		
			2340 lm	4000K	○	IMS-BL150-20W-840-S-15		
		▲ 24°	2175 lm	3000K	○	IMS-BL150-20W-830-S-24		
			2310 lm	4000K	○	IMS-BL150-20W-840-S-24		
		▲ 40°	2217 lm	3000K	○	IMS-BL150-20W-830-S-40		
			2313 lm	4000K	○	IMS-BL150-20W-840-S-40		
	>90	▲ 15°	1993 lm	3000K	○	IMS-BL150-20W-930-S-15		
			1963 lm	3000K	○	IMS-BL150-20W-930-S-24		
		▲ 24°	1978 lm	3000K	○	IMS-BL150-20W-930-S-40		
			1978 lm	3000K	○	IMS-BL150-20W-930-S-40		
		28W	>80	▲ 15°	3064 lm	3000K	○	IMS-BL150-28W-830-S-15
					3254 lm	4000K	○	IMS-BL150-28W-840-S-15
▲ 24°	3013 lm			3000K	○	IMS-BL150-28W-830-S-24		
	3208 lm			4000K	○	IMS-BL150-28W-840-S-24		
▲ 40°	3046 lm			3000K	○	IMS-BL150-28W-830-S-40		
	3209 lm			4000K	○	IMS-BL150-28W-840-S-40		
>90		▲ 15°	2767 lm	3000K	○	IMS-BL150-28W-930-S-15		
		▲ 24°	2727 lm	3000K	○	IMS-BL150-28W-930-S-24		
		▲ 40°	2763 lm	3000K	○	IMS-BL150-28W-930-S-40		




Technical Data test pattern


20W CRI80 15°

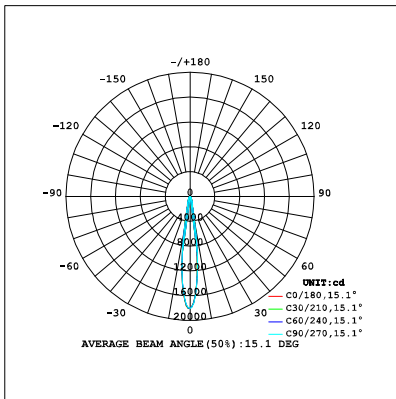


3000K

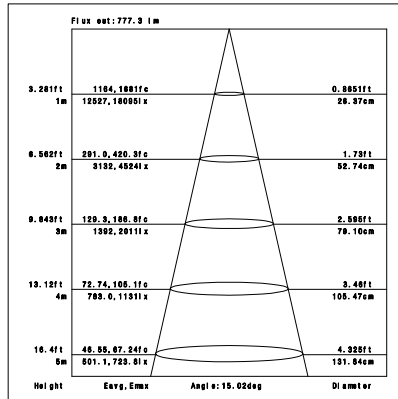


4000K

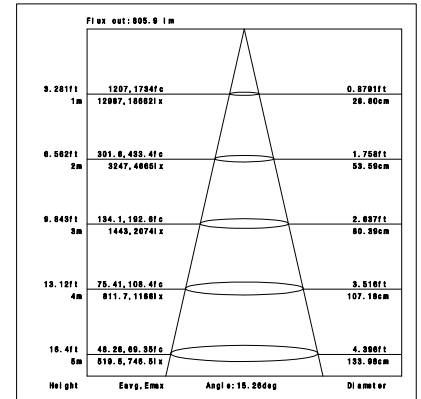


20W CRI80 24°

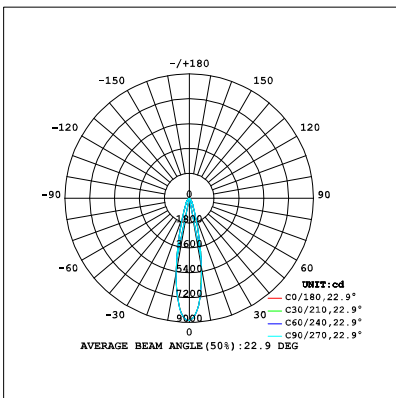


3000K

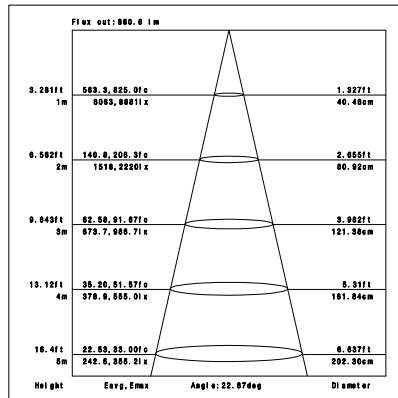


4000K

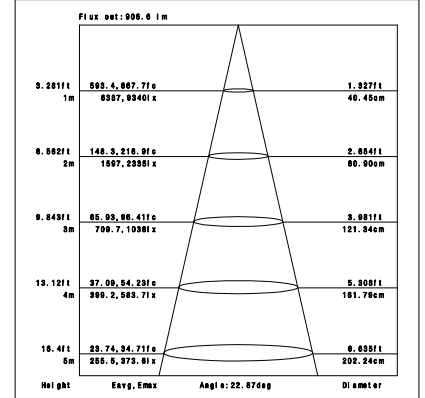


20W CRI80 40°

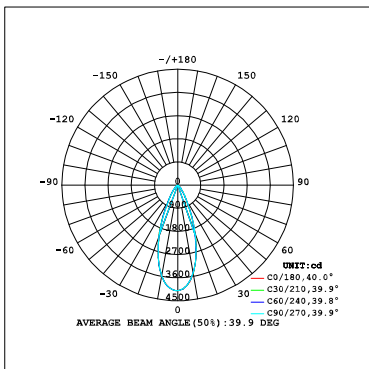


3000K

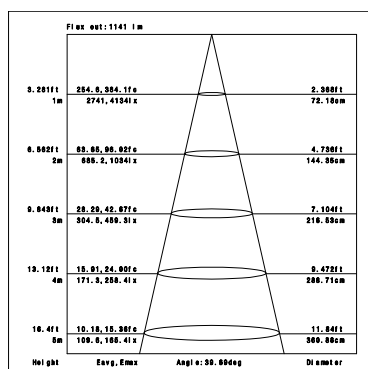


4000K

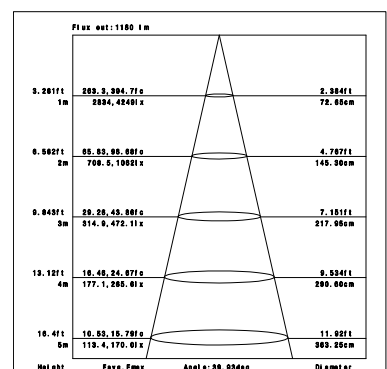


20W CRI90 15°

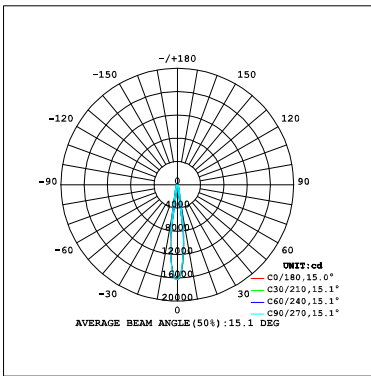


3000K

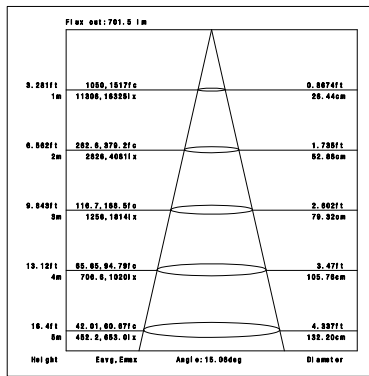


4000K

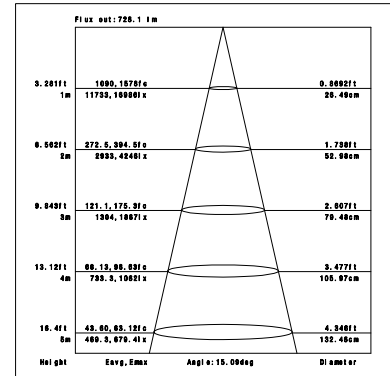


20W CRI90 24°

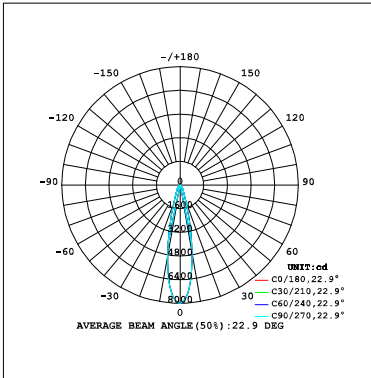


3000K

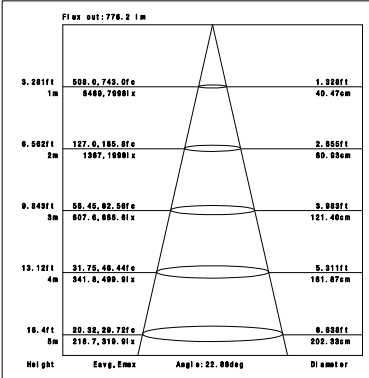


4000K

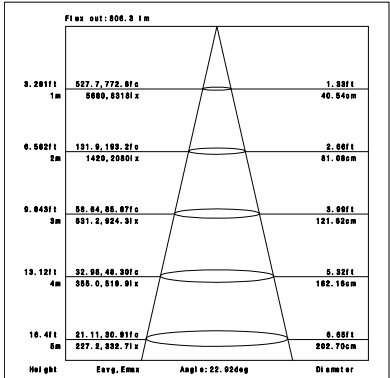


20W CRI90 40°

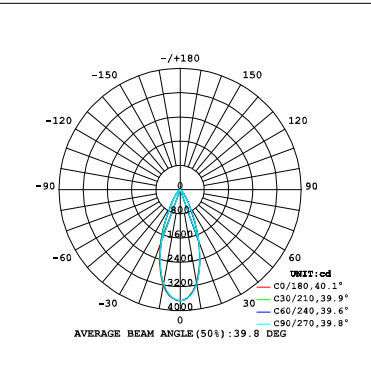


3000K

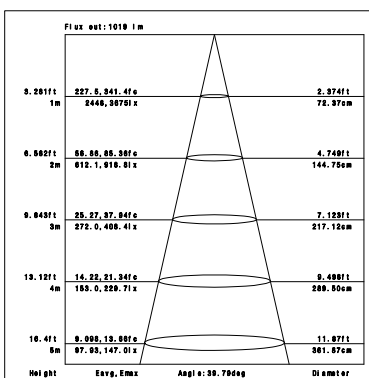


4000K

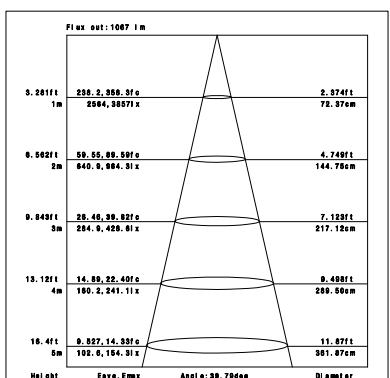


28W CRI80 15°

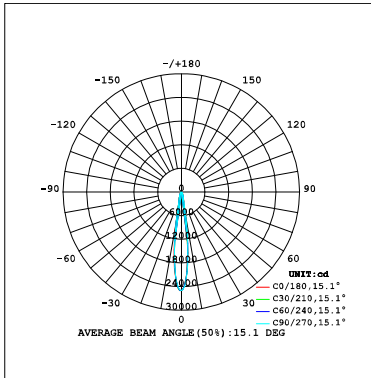


3000K

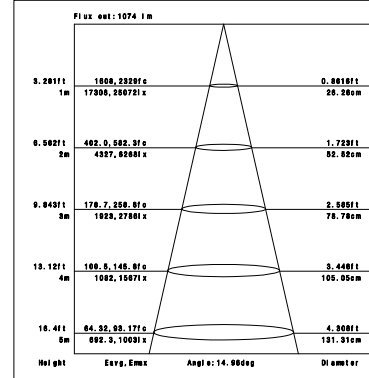


4000K

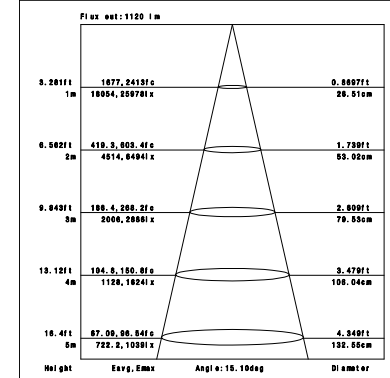


28W CRI80 24°

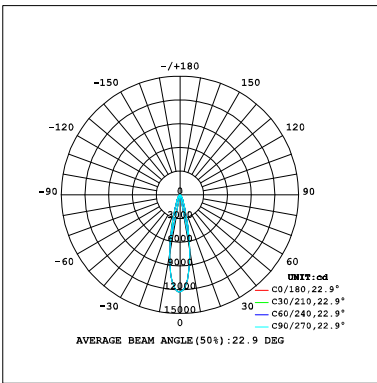


3000K

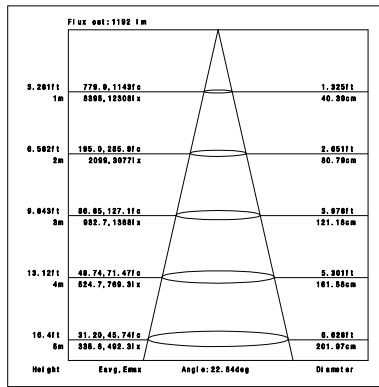


4000K

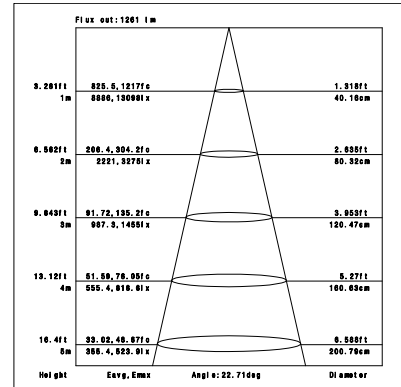


28W CRI80 40°

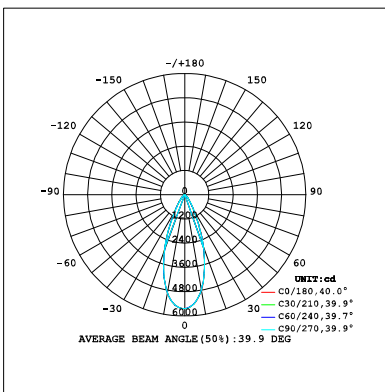


3000K

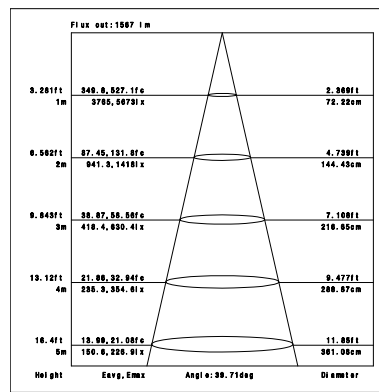


4000K

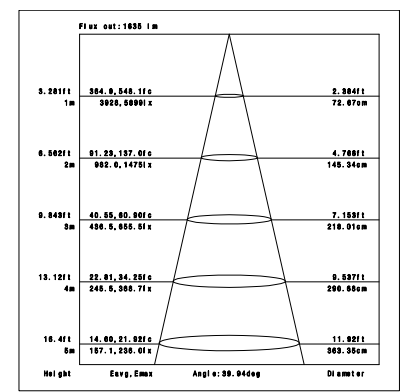


28W CRI90 15°

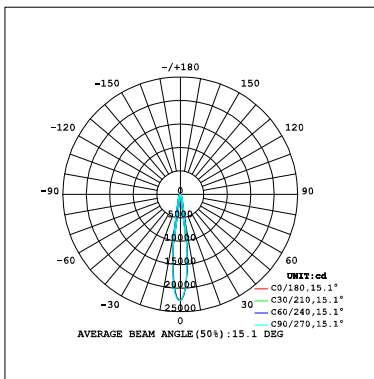


3000K

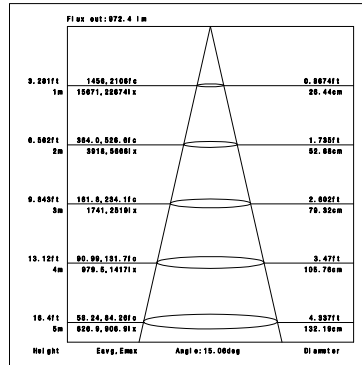

28W CRI90 24°


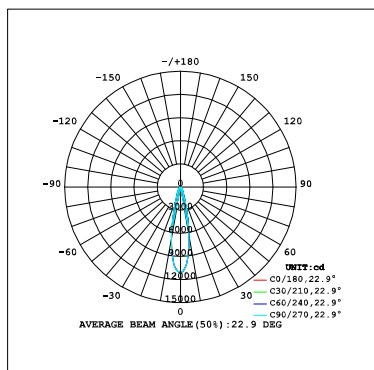


3000K

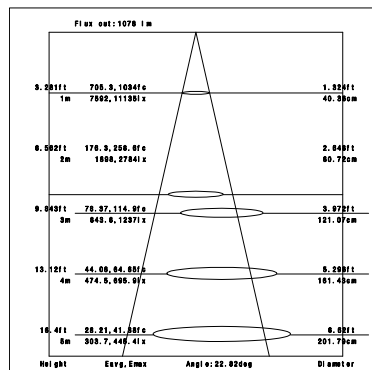


28W CRI90 40°

3000K

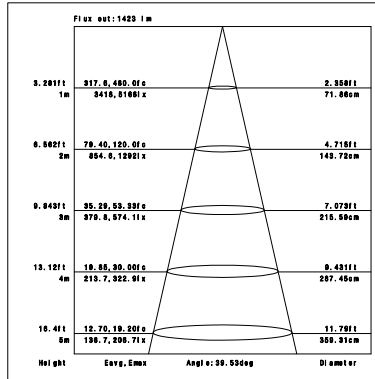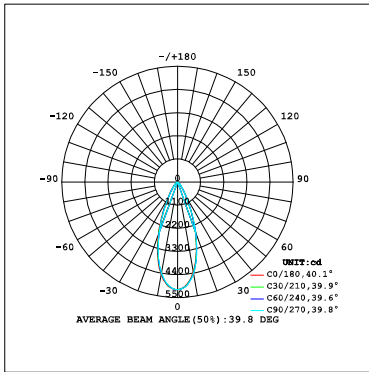


**Packaging:**

**IMS-BL150 (Without driver)**



**Box**  
 L170\*W170\*H160mm  
 1pc/box  
 GW: 0.9kg/box




**Outer carton**  
 L700\*W355\*H385mm  
 16pcs/CTN  
 GW: 15.4kg/carton




Installation instruction


1, Cut Hole

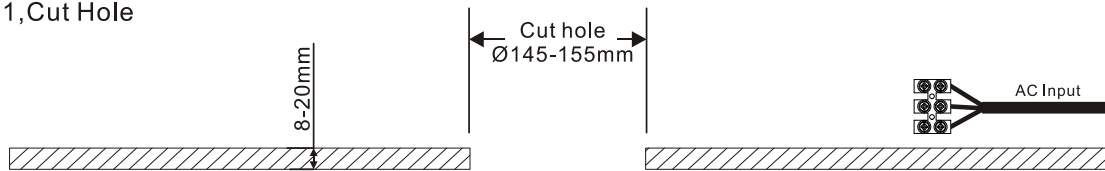


2, Connect Wire

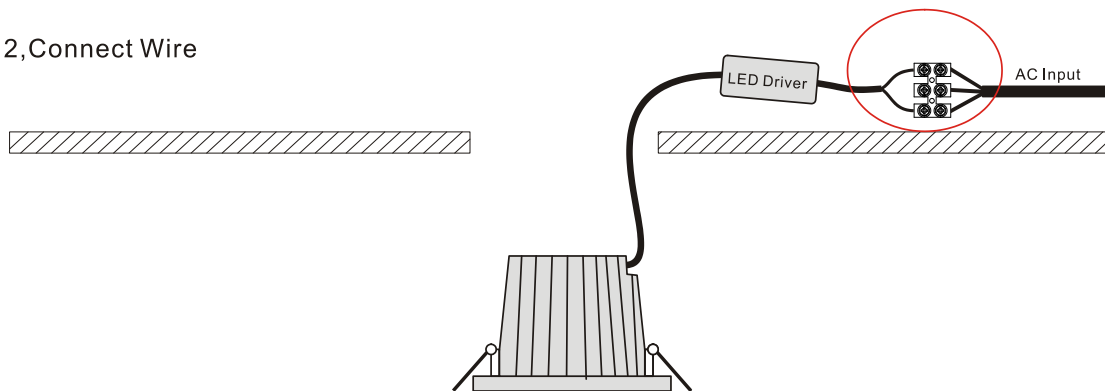

3, Fit the luminaire in the hole

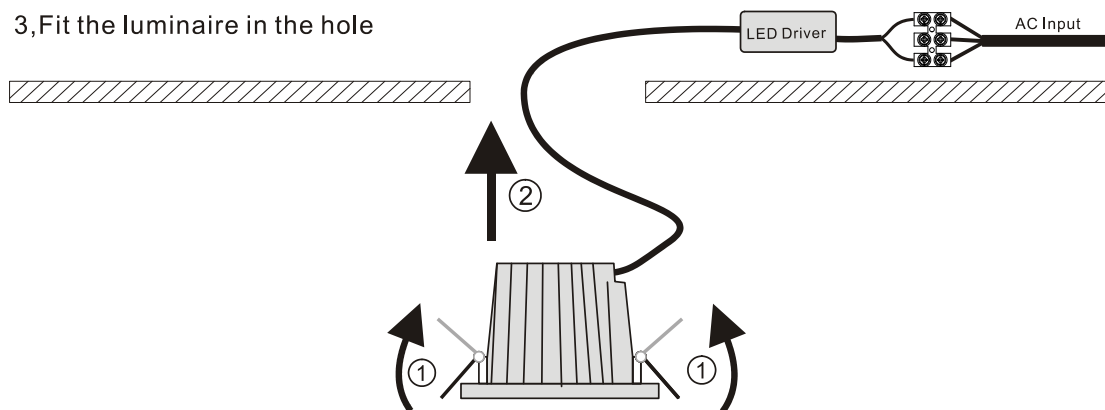

4, Finish

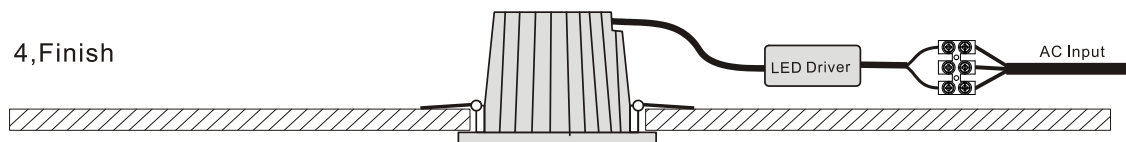

Product naming system

**DL ( X ) XX X ( H ) – XW – X XX – X- XX**

