

Halolite Series


M042-20W

Reflector



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
Current:	500mA
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Dimmability:	Dimmable Optional
Weight:	0.3KG

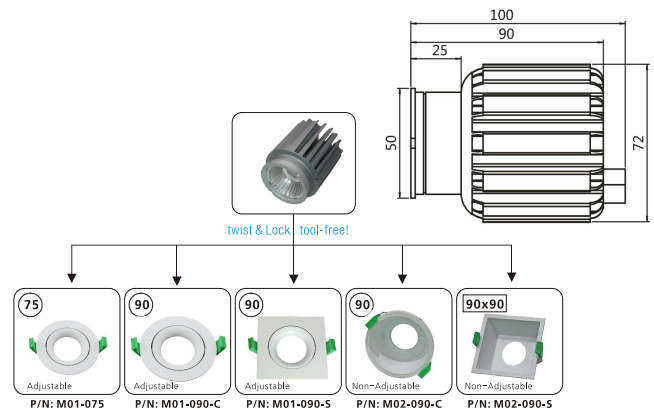









Ordering Information:

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
20W	>80	▲ 15°	2300 lm	3000K	○	M042*-20W-830-S-15
			2300 lm	4000K	○	M042*-20W-840-S-15
		▲ 24°	2270 lm	3000K	○	M042*-20W-830-S-24
			2275 lm	4000K	○	M042*-20W-840-S-24
		▲ 38°	2280 lm	3000K	○	M042*-20W-830-S-38
			2290 lm	4000K	○	M042*-20W-840-S-38
	▲ 60°	2295 lm	3000K	○	M042*-20W-830-S-60	
		2310 lm	4000K	○	M042*-20W-840-S-60	
	>90	▲ 15°	1880 lm	3000K	○	M042*-20W-930-S-15
			2110 lm	4000K	○	M042*-20W-940-S-15
		▲ 24°	1850 lm	3000K	○	M042*-20W-930-S-24
			2075 lm	4000K	○	M042*-20W-940-S-24
▲ 38°		1870 lm	3000K	○	M042*-20W-930-S-38	
		2115 lm	4000K	○	M042*-20W-940-S-38	
▲ 60°	1885 lm	3000K	○	M042*-20W-930-S-60		
	2120 lm	4000K	○	M042*-20W-940-S-60		

○ Silver gray


**": 1: S-MR16; 2: M01-075; 3: M01-090-C; 4: M01-090-S; 5: M02-090-C; 6: M02-090-S

Technical Data test pattern

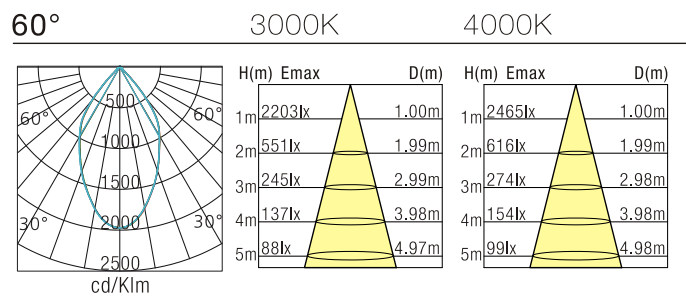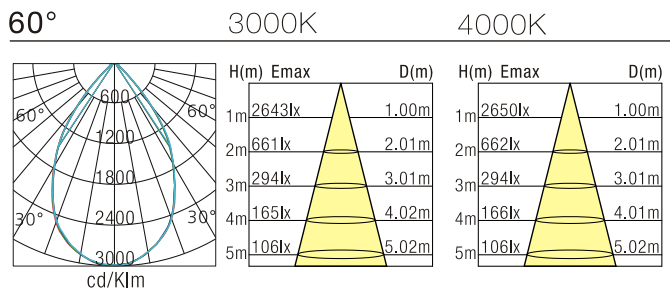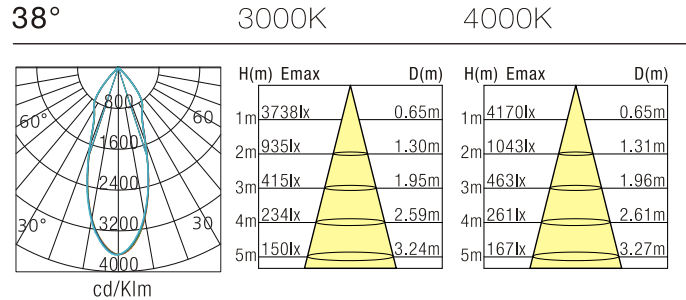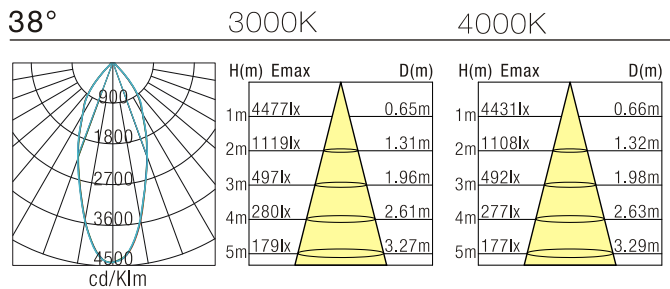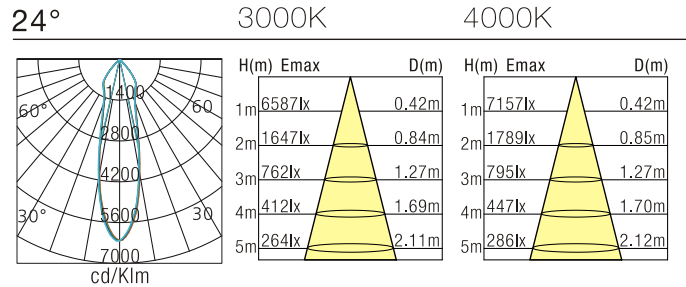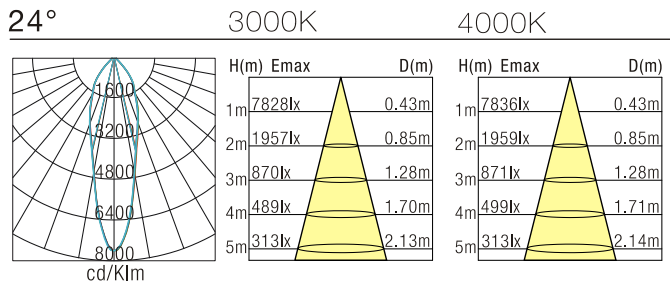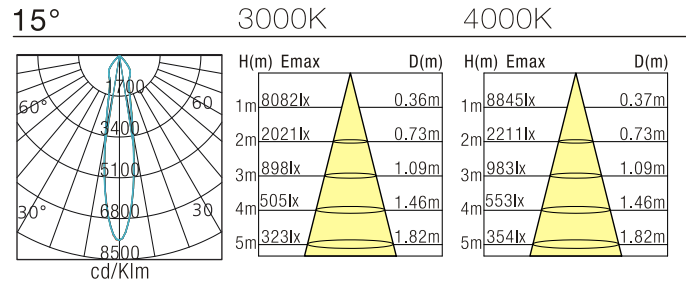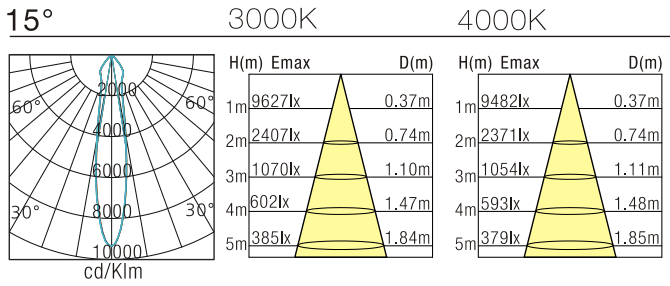


Installation instruction


M04 Module + M01-090-C/S Installation

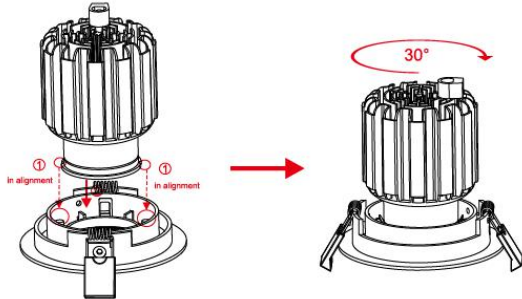

M04 Module + M02-090-C Installation

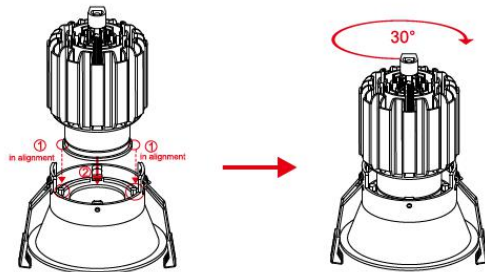


M04 Module + M02-090-S Installation

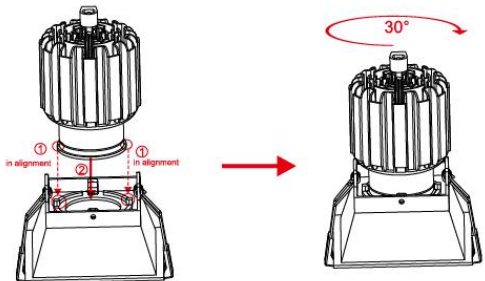


1, Cut Hole



2, Connect Wire

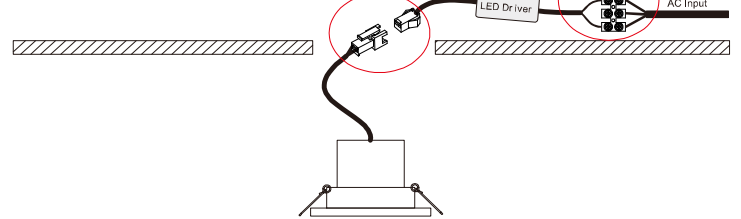

3, Fit the luminaire in the hole


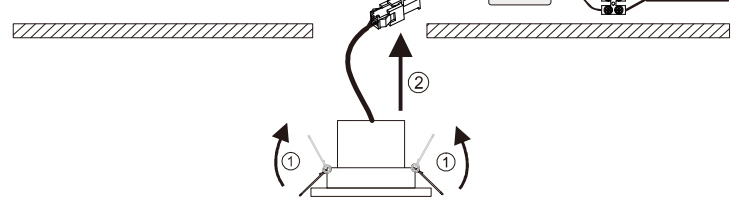


4, Finish



Packaging:

M042 (Without driver)



Box
 L105*W105*H125mm
 1pc/box
 GW: 0.4kg/box

Outer carton
 L430*W430*H390mm
 48pcs/CTN
 GW: 20.2kg/carton

Product Nomenclature

