

# EDGE II


## Recessed Downlight

Norms: EN 60598-1, EN 60598-2-1, EN60598-2-2

### Product information



Product number:	REG2075W - 11W
Input Voltage (v):	220-240V
Dimming:	On/Off, TRIAC, 1-10V, DALI
Light source:	COB LED
luminaire Lifetime:	50.000h (L80-B10, Ta25°C)
Rotation Angle (degree):	350
Tilting Angle (degree):	N/A
IP Rating:	20
Working Temperature (°C)	-5 ~ +30
Storage Temperature (°C)	-20 ~ +50
Material:	Aluminium
Fitting Colors:	9016 Sandy White / 9017 Sandy Black

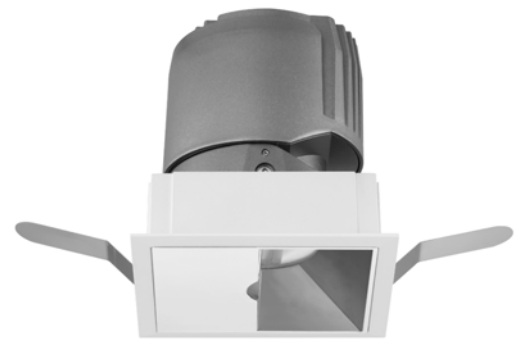

Square Trim




Square Trimless

### Packaging information

N.W. lamp (Kg)	0.37
G.W. Carton (Kg)	18
Master carton dimensions(mm)	678x670x277
Quantity per carton(PCS)	40

Beam	Watt	CRI	Luminous	CCT	Code
W10-S	11W	90	407.5	4000K	REG2075WS-11G40
			391.0	3000K	REG2075WS-11G30
			367.5	2700K	REG2075WS-11G27
W10-M	11W	90	561.0	4000K	REG2075WM-11G40
			485.2	3000K	REG2075WM-11G30
			456.0	2700K	REG2075WM-11G27
W10-F	11W	90	467.5	4000K	REG2075WF-11G40
			451.2	3000K	REG2075WF-11G30
			424.1	2700K	REG2075WF-11G27

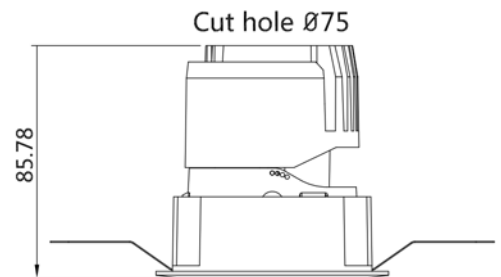

Code composition: REG2 075 W S1 W - R S 01 - D 20 G27

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

Product Code	Hole Cut Size	Structural	Structural style	Finishes	Optical	Angle	Anti-glare cover	Dimming	Watt	LED	Kelvin & CRI	
REG2	Φ95mm	Fixed	R1 Round Trim	White	Reflector	S Spot	01 Mirror silver	X Not-Driver	20W	H27	2700 95	
	Φ75mm	Adjustable	R2 Round Trimless	Black	Lens	M Medium	02 Flax Silver	T TRIAC		G27	2700 90	
	Φ55mm	Wall Washer	S1	Square Trim			F Flood	03 Matte white	V 1-10V		G30	3000 90
				S2 Square Trimless				04 Blinding black	D DALI		G40	4000 90
							05 Bright black		E50	5000 80		
							06 Matte black					
							07 Charm Gold					