

Pro Series


RL06-30W

Reflector



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	700mA (35-37V)
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE ROHS
Weight:	1.15KG

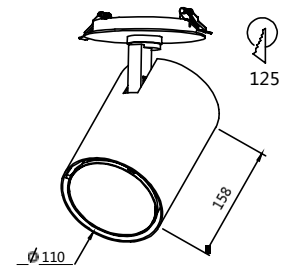

Ordering Information:

○ White ● Black

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
30W	>80	▲ 15°	2980 lm	3000K	○	RL061-30W-830-W-15
			3160 lm	4000K	○	RL061-30W-840-W-15
		▲ 20°	3010 lm	3000K	○	RL061-30W-830-W-20
			3250 lm	4000K	○	RL061-30W-840-W-20
		▲ 45°	2990 lm	3000K	○	RL061-30W-830-W-45
			3190 lm	4000K	○	RL061-30W-840-W-45
	>90	▲ 15°	2670 lm	3000K	○	RL061-30W-930-W-15
			2810 lm	4000K	○	RL061-30W-940-W-15
		▲ 20°	2700 lm	3000K	○	RL061-30W-930-W-20
			2830 lm	4000K	○	RL061-30W-940-W-20
		▲ 45°	2680 lm	3000K	○	RL061-30W-930-W-45
			2810 lm	4000K	○	RL061-30W-940-W-45



Ceiling recessed spotlight






Technical Data test pattern

CRI80 15°

3000K




4000K

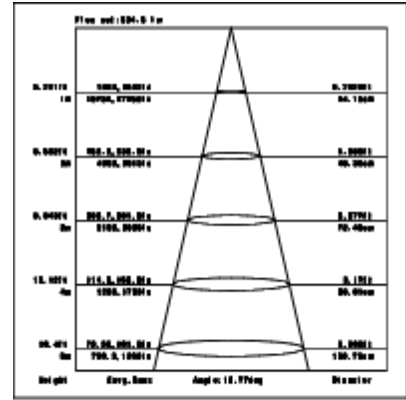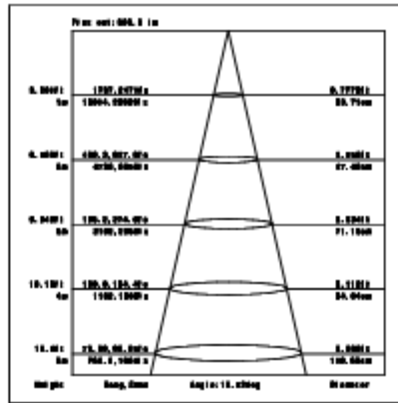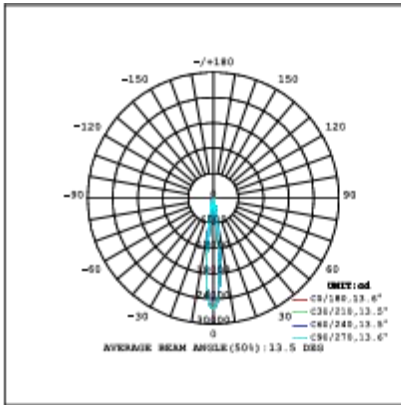

CRI80 20°

3000K




4000K

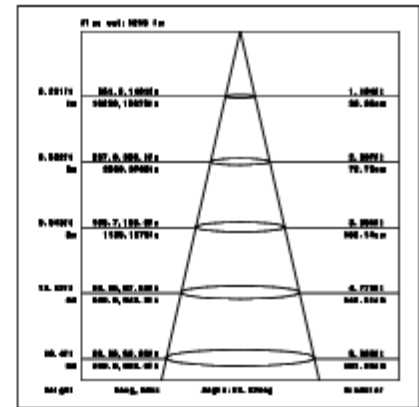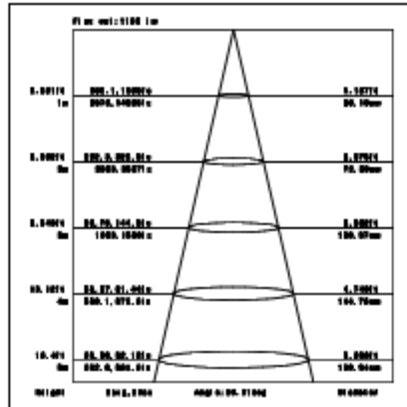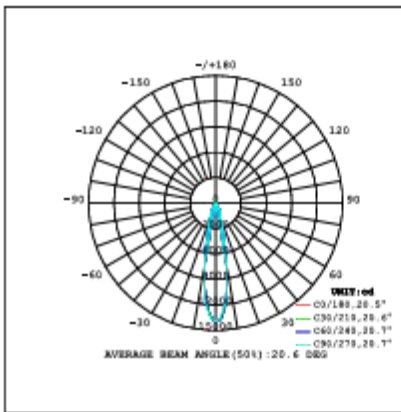

CRI80 45°

3000K




4000K

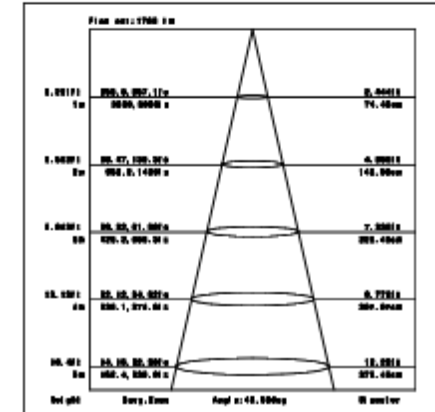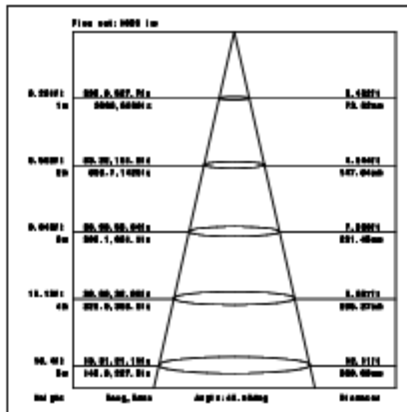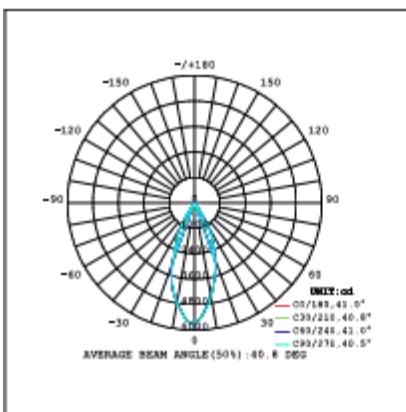

CRI90 15°

3000K




4000K

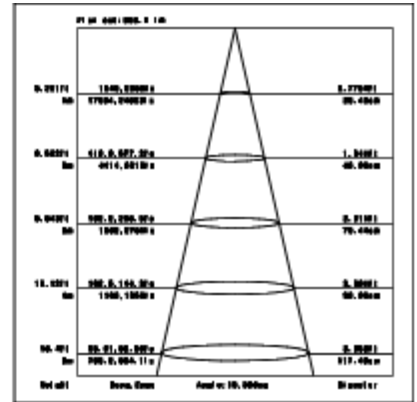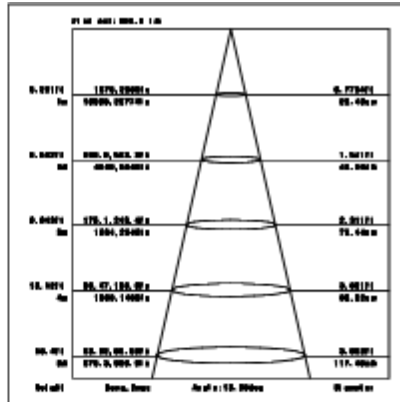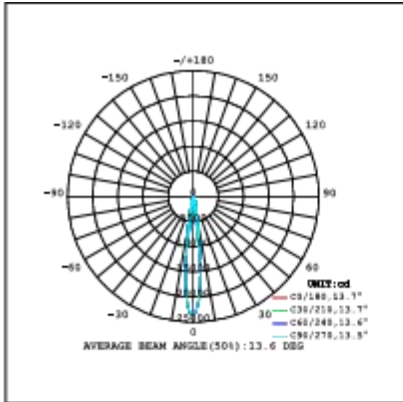

CRI90 20°

3000K




4000K

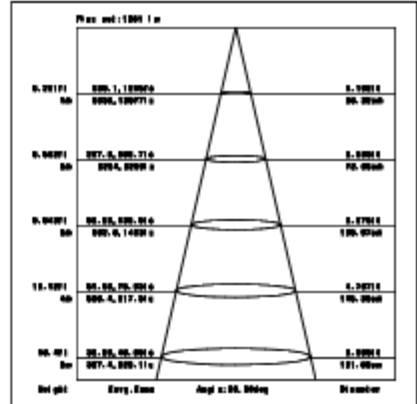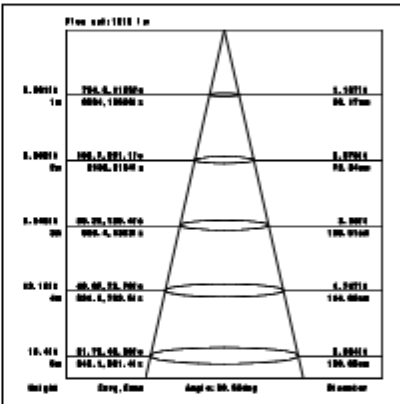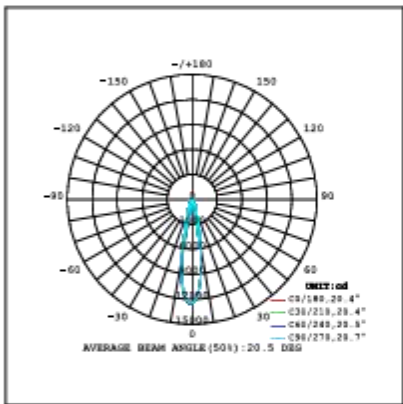


CRI90 45°

3000K


4000K

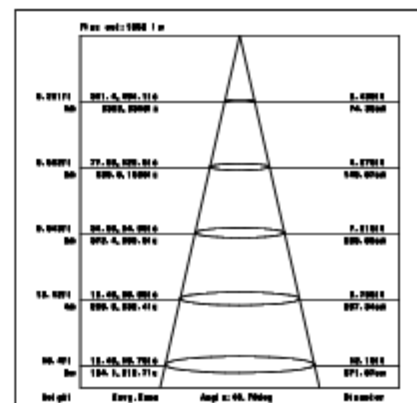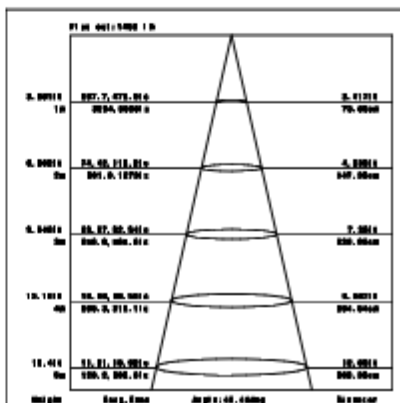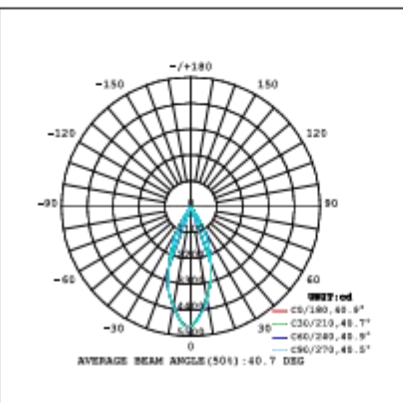

Packaging:




Box
L195*W130*H240mm
1pc/box
GW: 1.15kg/box

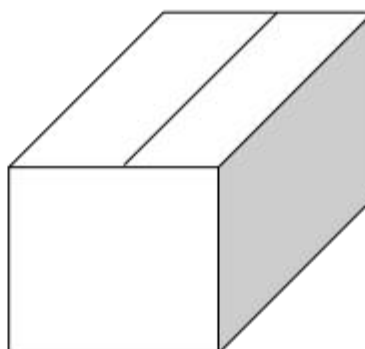


Outer carton
L540*W410*H260mm
8 pcs/CTN
GW: 10.5kg/carton

Installation instruction


1, Cut Hole

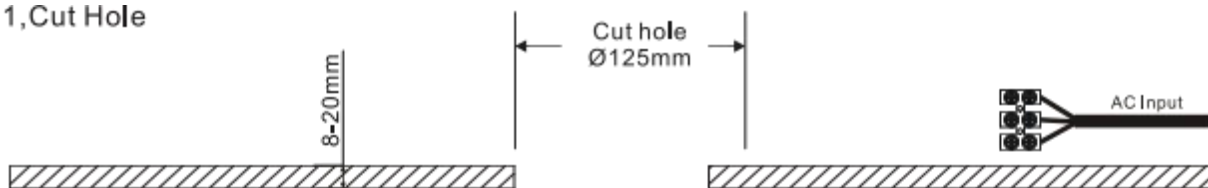


2, Connect Wire

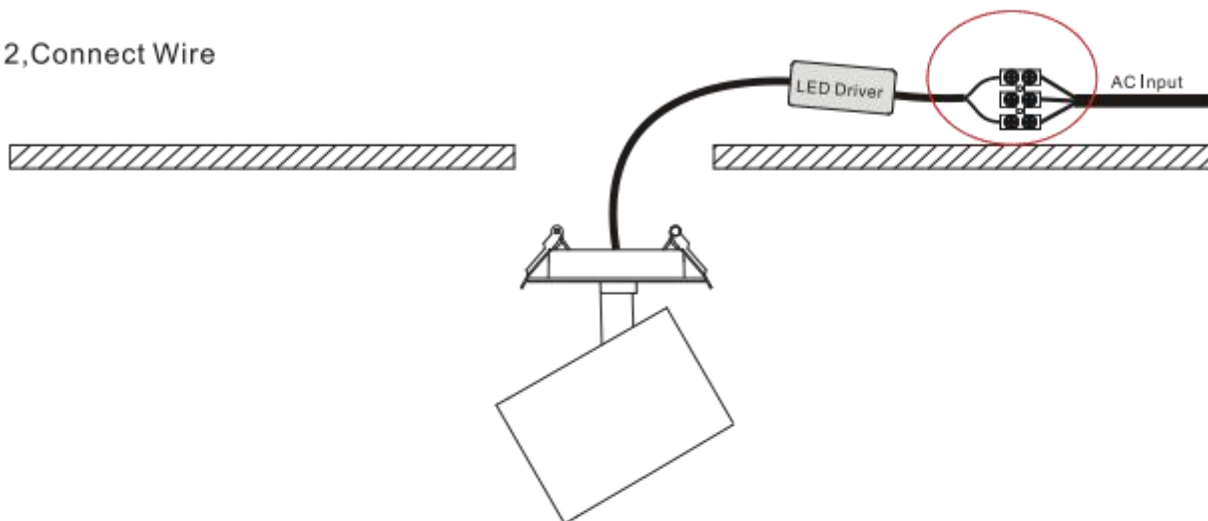

3, Fit the luminaire in the hole

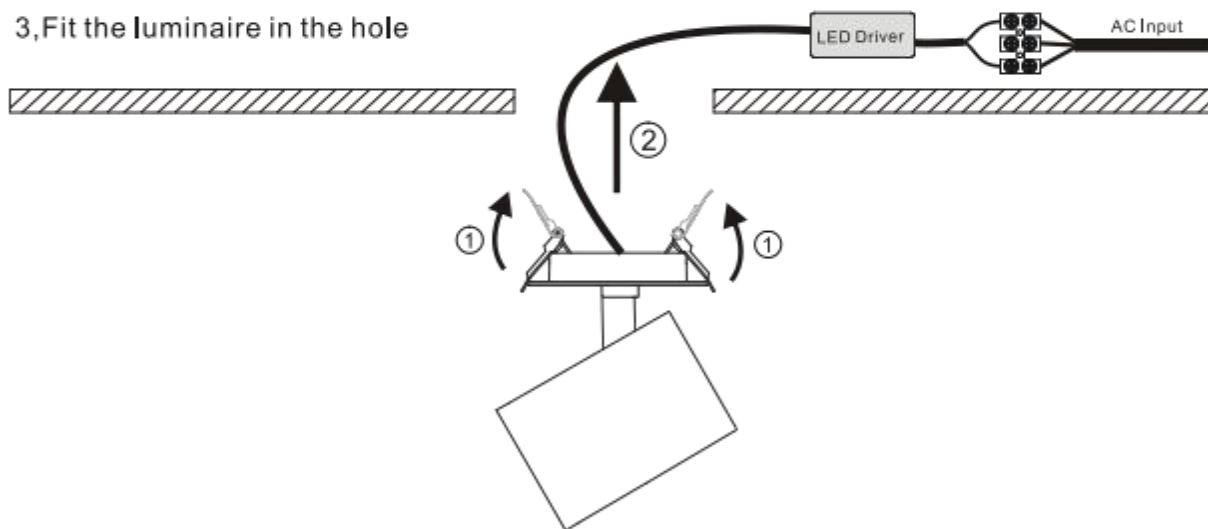

4, Finish

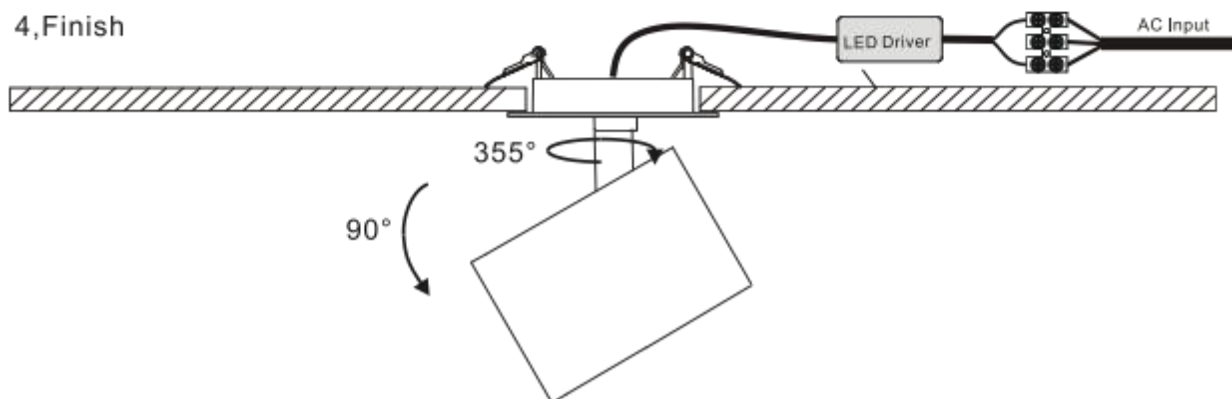

Product naming system

