


Pro Series

**SD041-30W**

Reflector

Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	700mA, 35-37V
Rated life:	>50,000 hours
Operating temperature:	-20℃~40℃
Storage temperature:	-30℃~60℃
Certificate:	CE/RoHS
Dimmability:	NON-Dimmable
Weight:	1.150KG

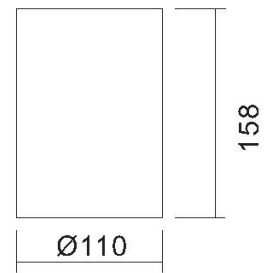

Ordering Information:

○ White ● Black




Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
30W	>80	▲ 15°	2980 lm	3000K	○	SD041-30W-830-W-15
					●	SD041-30W-830-B-15
		3160 lm	4000K	○	SD041-30W-840-W-15	
				●	SD041-30W-840-B-15	
		▲ 20°	3010 lm	3000K	○	SD041-30W-830-W-20
					●	SD041-30W-830-B-20
	3250 lm	4000K	○	SD041-30W-840-W-20		
			●	SD041-30W-840-B-20		
	▲ 45°	2990 lm	3000K	○	SD041-30W-830-W-45	
				●	SD041-30W-830-B-45	
	3190 lm	4000K	○	SD041-30W-840-W-45		
			●	SD041-30W-840-B-45		
>90	▲ 15°		2670 lm	3000K	○	SD041-30W-930-W-15
					●	SD041-30W-930-B-15
		2810 lm	4000K	○	SD041-30W-940-W-15	
				●	SD041-30W-940-B-15	
		▲ 20°	2700 lm	3000K	○	SD041-30W-930-W-20
					●	SD041-30W-930-B-20
	2830 lm	4000K	○	SD041-30W-940-W-20		
			●	SD041-30W-940-B-20		
	▲ 45°	2680 lm	3000K	○	SD041-30W-930-W-45	
				●	SD041-30W-930-B-45	
	2810 lm	4000K	○	SD041-30W-940-W-45		
			●	SD041-30W-940-B-45		

Technical Data test pattern

CRI80 15°

3000K




4000K

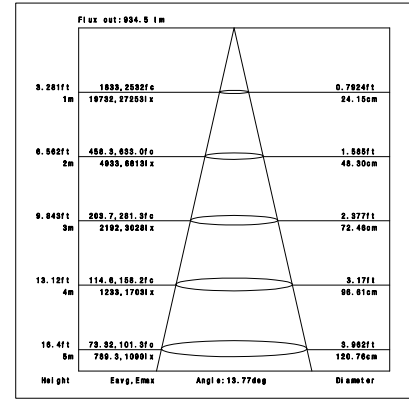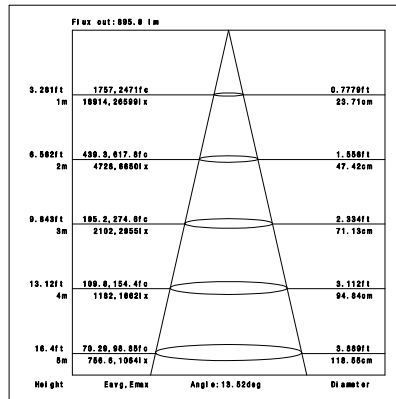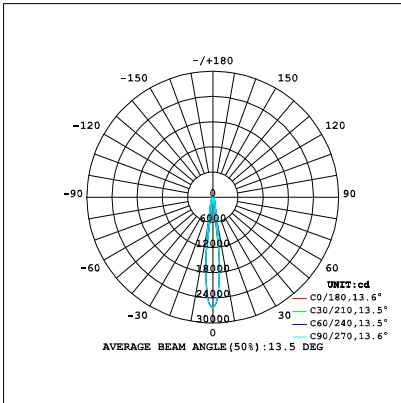

CRI80 20°

3000K




4000K

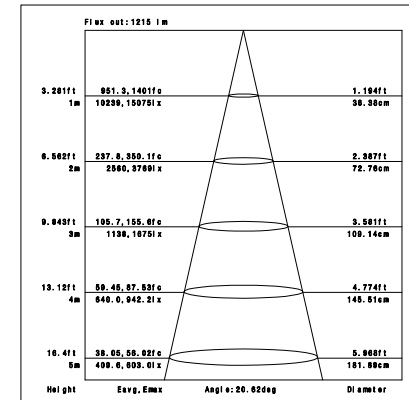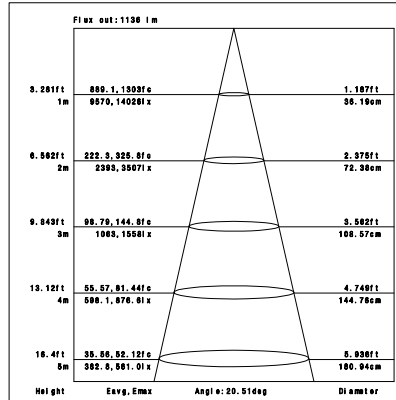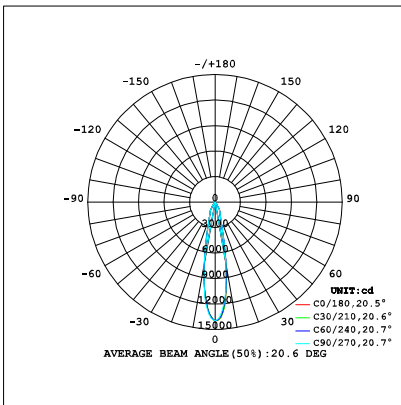


CRI80 45°

3000K


4000K

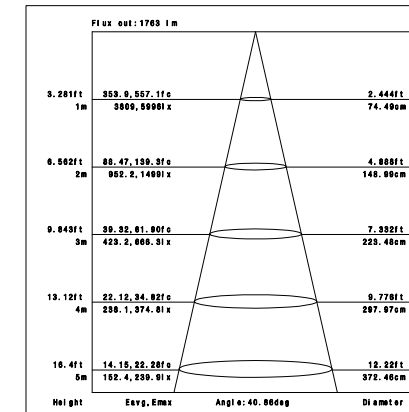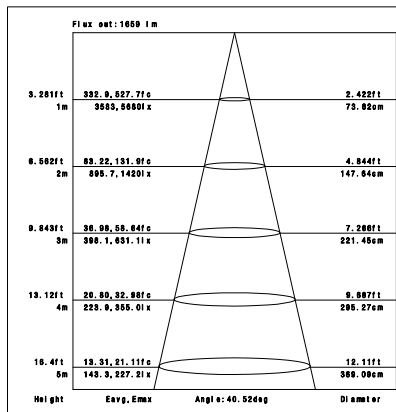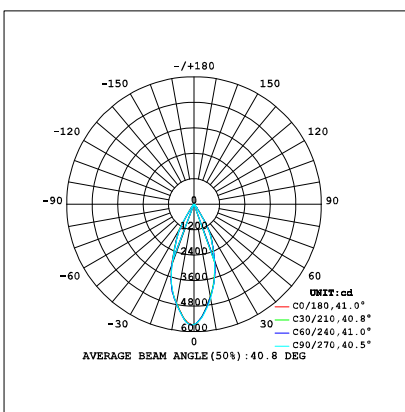


CRI90 15°

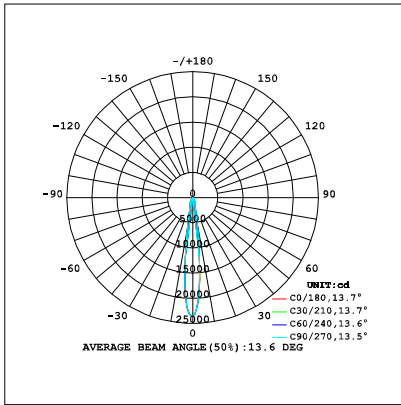


3000K

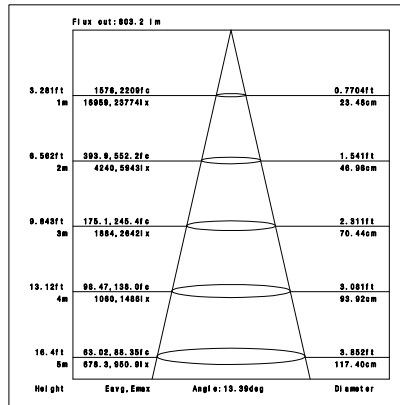


4000K

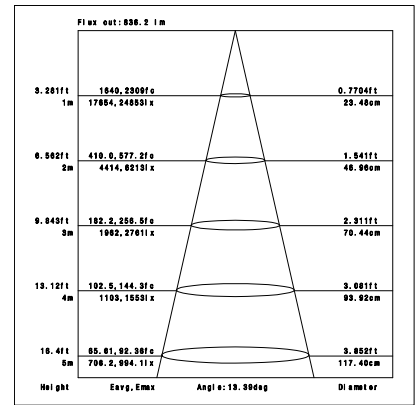


CRI90 20°

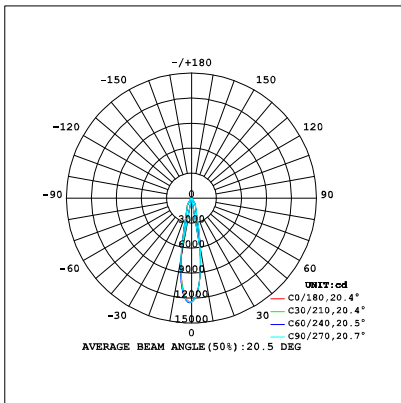


3000K

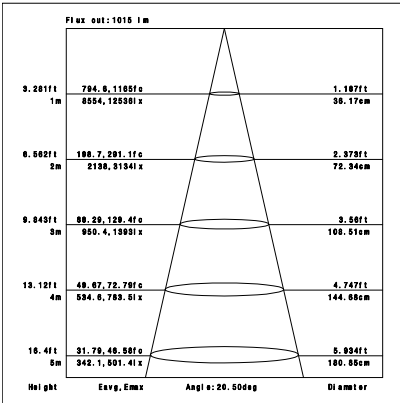


4000K

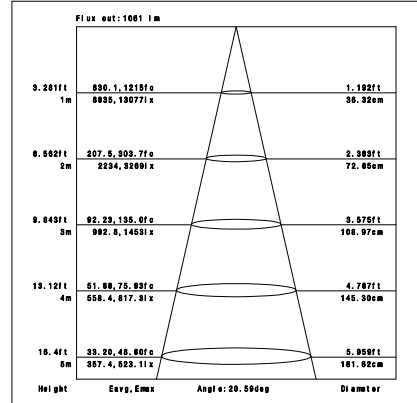


CRI90 45°

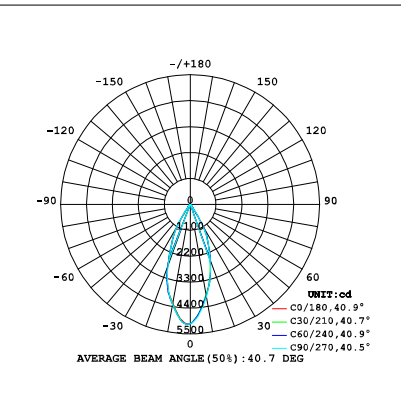


3000K

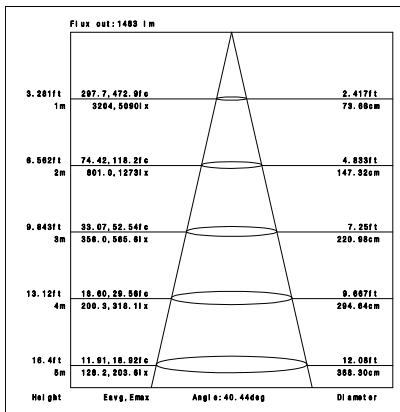


4000K

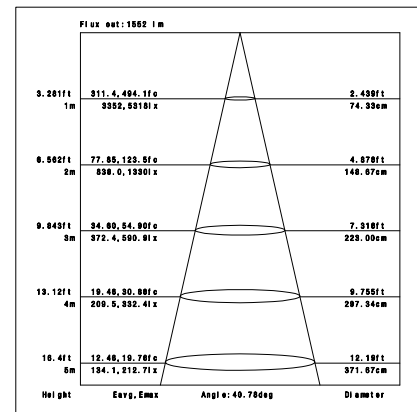


Installation instruction

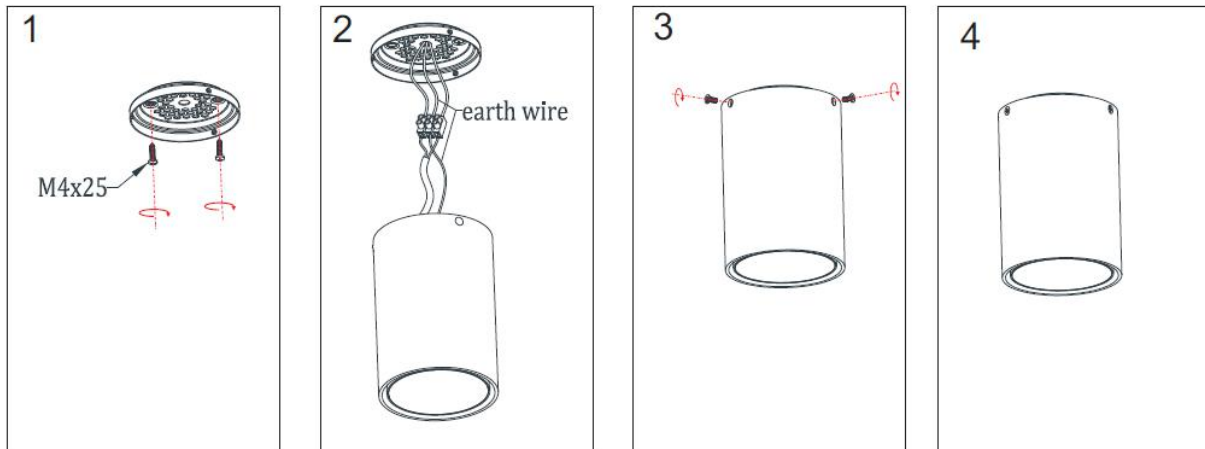

Packaging:




**Box**  
 L140\*W140\*H205mm  
 1pc/box  
 GW: 1.95kg/box

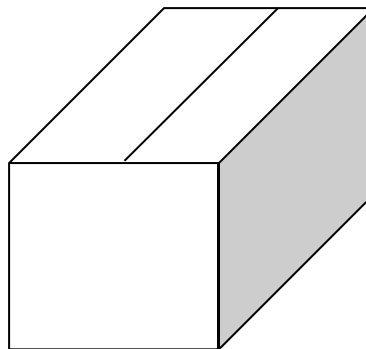

**Outer carton**  
 L730xW310xH220mm  
 10 pcs/CTN  
 GW: 21kg/carton

Product Nomenclature

**SD ( X ) XX X (H) = X = X XX = X- XX**

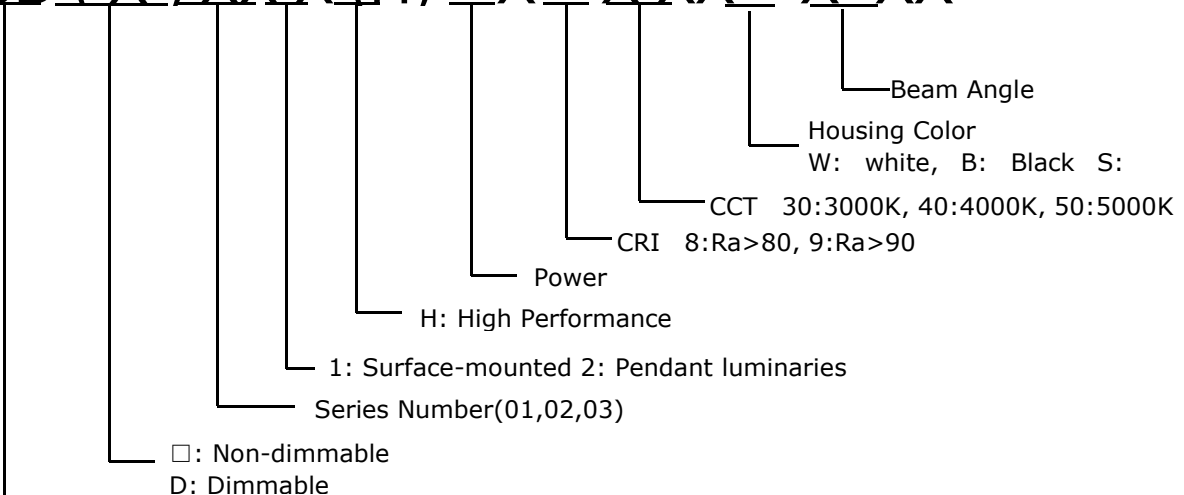

04

□: Non-dimmable  
 D: Dimmable