


iTrack Vera Series

TL22-20W

Reflector

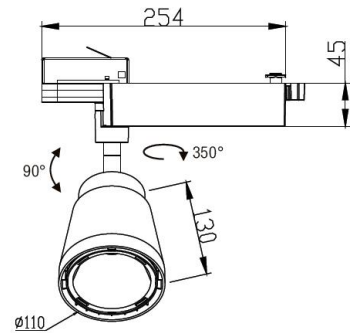

Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	500mA, 35-37V
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Weight:	1.15KG

Ordering Information:

○White ●Black




Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
20W	>80	▲ 10°	2040 lm	3000K	○	TL224-20W-830-W-10
					●	TL224-20W-830-B-10
		2050 lm	4000K	○	TL224-20W-840-W-10	
				●	TL224-20W-840-B-10	
		▲ 20°	2060 lm	3000K	○	TL224-20W-830-W-20
					●	TL224-20W-830-B-20
	2060 lm	4000K	○	TL224-20W-840-W-20		
			●	TL224-20W-840-B-20		
	▲ 38°	2050 lm	3000K	○	TL224-20W-830-W-38	
				●	TL224-20W-830-B-38	
	2040 lm	4000K	○	TL224-20W-840-W-38		
			●	TL224-20W-840-B-38		
>90	▲ 10°	1730 lm	3000K	○	TL224-20W-930-W-10	
				●	TL224-20W-930-B-10	
	1870 lm	4000K	○	TL224-20W-940-W-10		
			●	TL224-20W-940-B-10		
	▲ 20°	1750 lm	3000K	○	TL224-20W-930-W-20	
				●	TL224-20W-930-B-20	
1900 lm	4000K	○	TL224-20W-940-W-20			
		●	TL224-20W-940-B-20			
▲ 38°	1750 lm	3000K	○	TL224-20W-930-W-38		
			●	TL224-20W-930-B-38		
1890 lm	4000K	○	TL224-20W-940-W-38			
		●	TL224-20W-940-B-38			

Technical Data test pattern

CRI80 10°

3000K




4000K

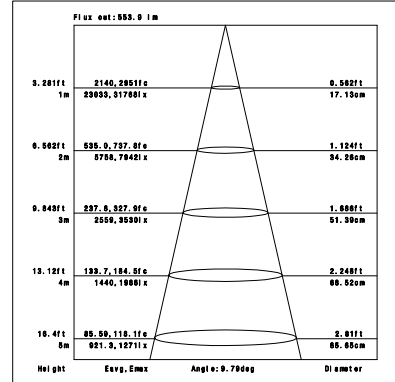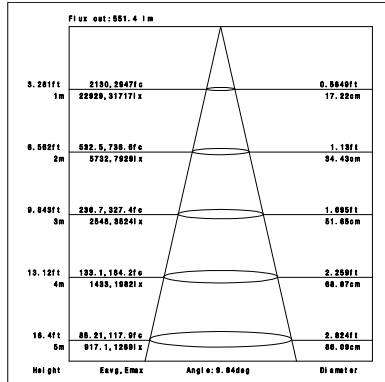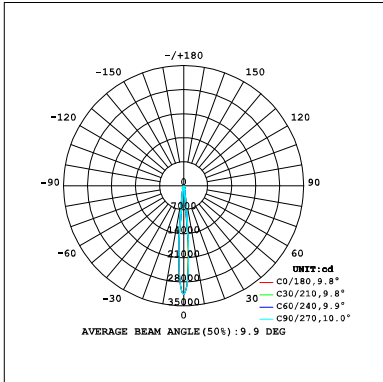

CRI80 20°

3000K




4000K

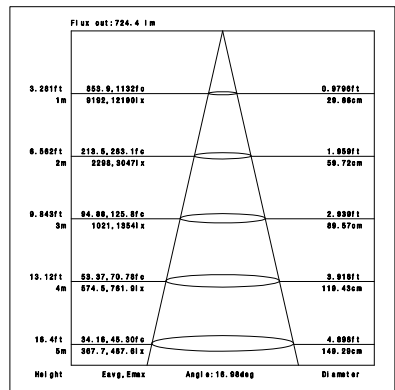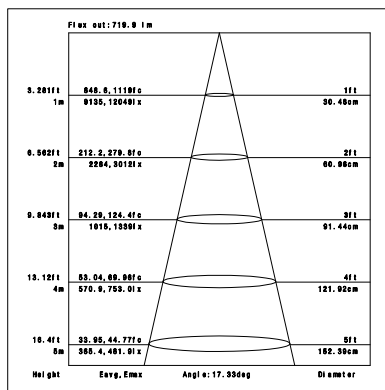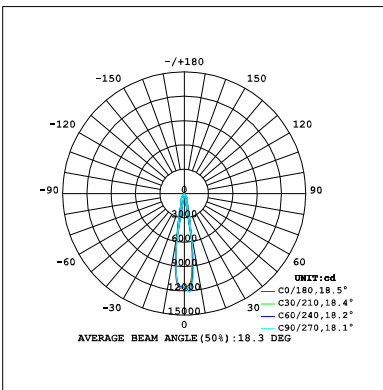


CRI80 38°

3000K


4000K

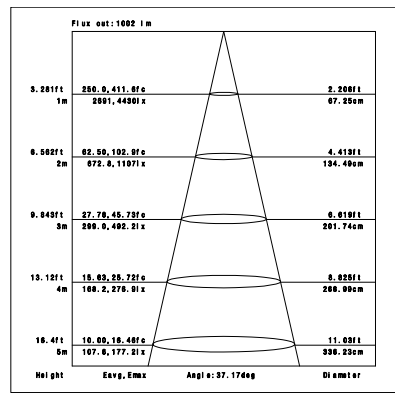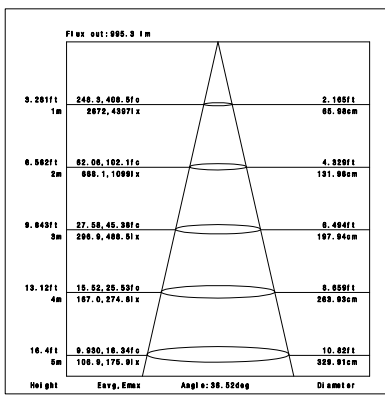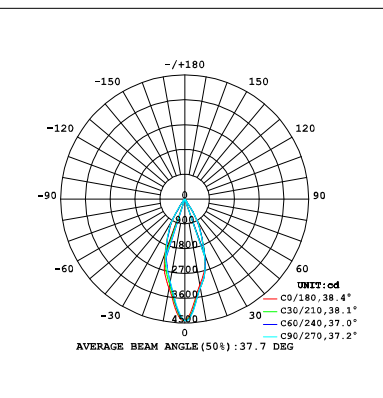


CRI90 10°

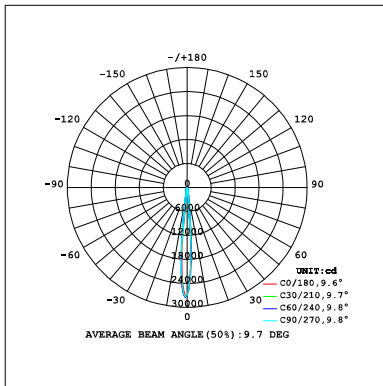


3000K

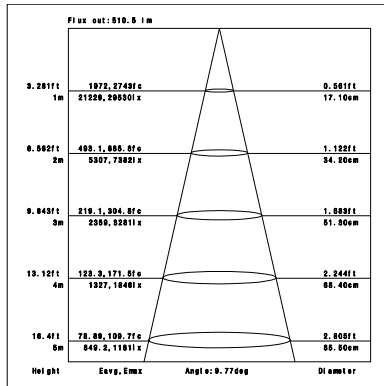


4000K

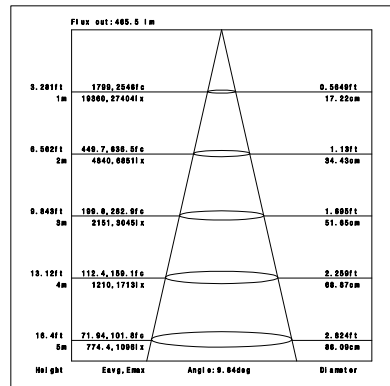


CRI90 20°

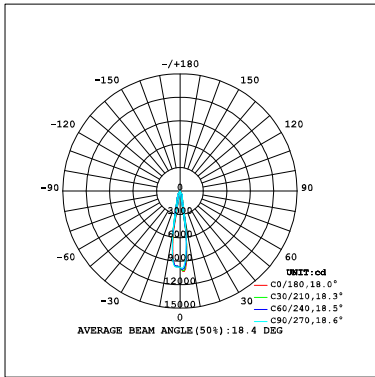


3000K

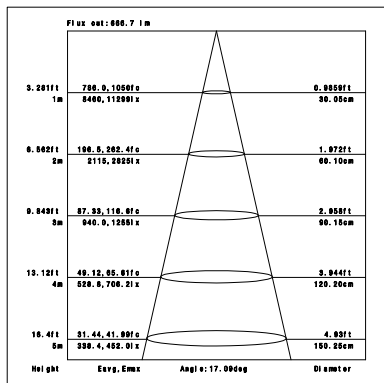


4000K

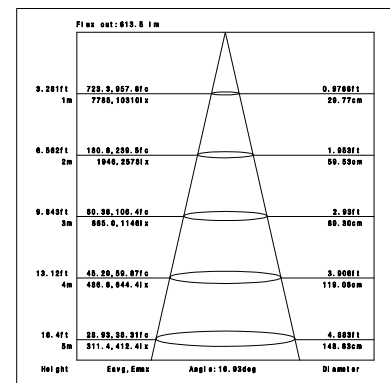


CRI90 38°

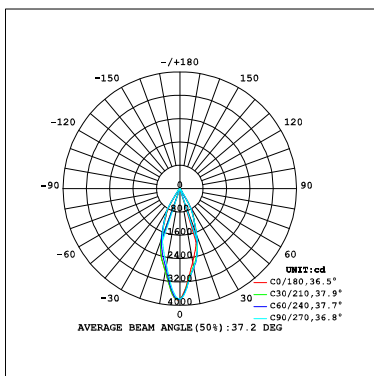


3000K

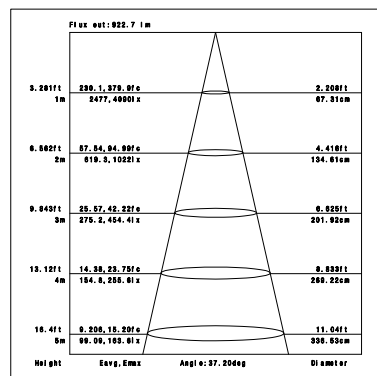


4000K

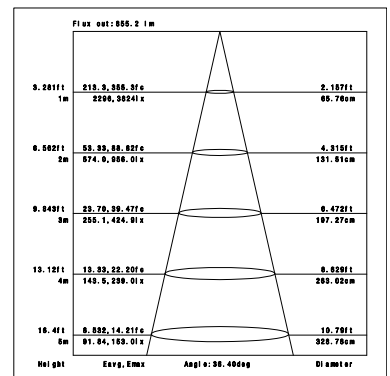

Packaging:







Box
L288*W256H120mm
1pc/box
GW: 1.35kg/box



Outer carton
L600XW540xH265mm
8pcs/CTN
GW: 12kg/carton

Installation instruction

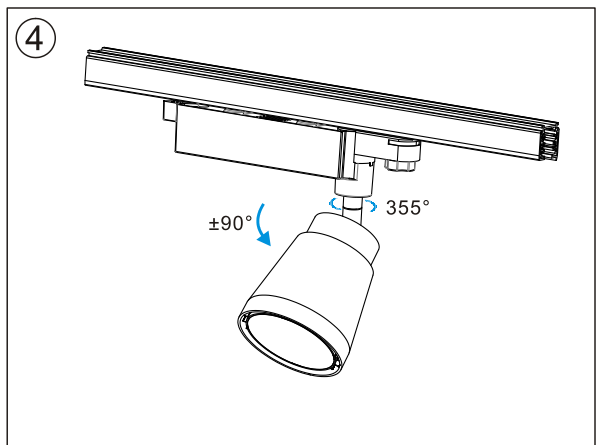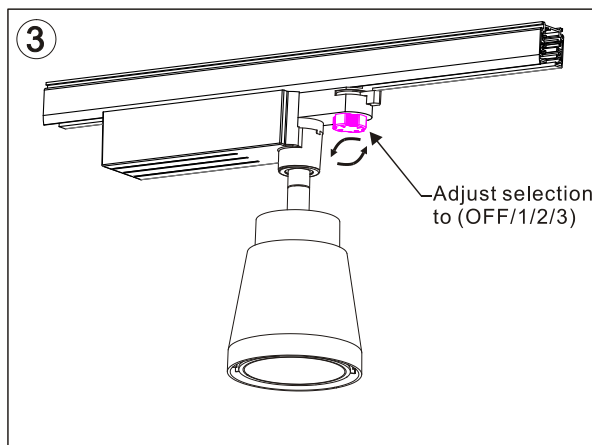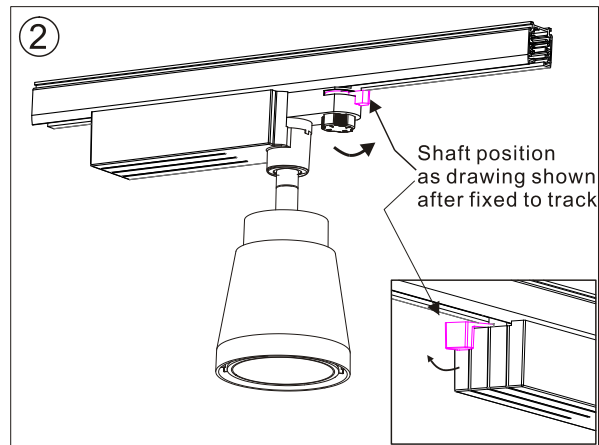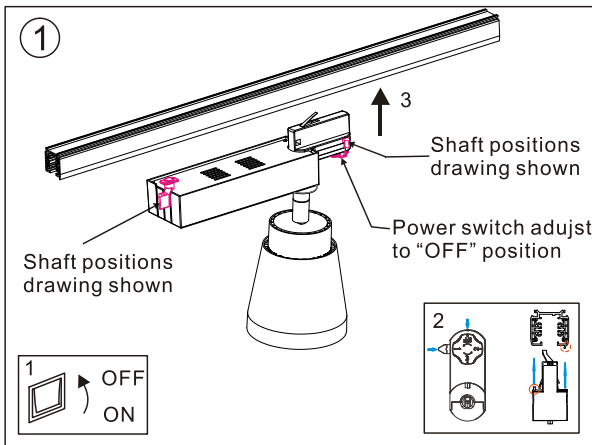

Product naming system

