

Product information






Product number:	TL45M-Pro D2M Series
Track System:	6 wire, 4 wire
Input Voltage (v):	220-240V
Dimming:	On/Off, TRIAC, Knob, DALI
Light source:	COB LED
luminaire Lifetime:	50.000h (L80-B10, Ta25°C)
Rotation Angle (degree):	350
Tilting Angle (degree):	90
IP Rating:	20
Working Temperature (°C)	-5 ~ +30
Storage Temperature (°C)	-20 ~ +50
Material:	Aluminium
Fitting Colors:	9016 Sandy White / 9017 Sandy Black




L03 Diffuser

Packaging information

N.W. lamp (Kg)	0.38
G.W. Carton (Kg)	9
Master carton dimensions(mm)	430x430x390
Quantity per carton(pcs):	16

Beam	Watt	CRI	Luminous	CCT	Code
19 	15W	90	744.6 ml	2000-3000K	TL454M-Pro-15G2030-S-L03
			819.3 ml		TL454M-Pro-15G2030-S
24 	15W	90	797.4 ml	2000-3000K	TL454M-Pro-15G2030-M-L03
			882.5 ml		TL454M-Pro-15G2030-M
33 	15W	90	788.6 ml	2000-3000K	TL454M-Pro-15G2030-F-L03
			857.4 ml		TL454M-Pro-15G2030-F

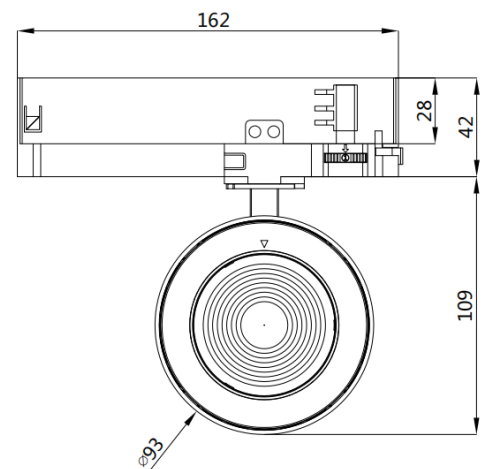

Code composition: TL45 X M - Pro - X 15 G2030 - B S - L01

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Code	② Track	③ Dimensions	④ Series	⑤ Dimming type	⑥ Watt	⑦ LED Kelvin & CRI	⑧ Finishes	⑨ Optical angle	⑩ Accessories
TL45	6 Wire 4 Wire	M	Pro	X Not-Driver T TRIAC K Knob D DALI	15W	G27 2700 >90 G30 3000 >90	White Black	S Spot M Medium F Flood	L03 Diffuser