

Product information



Product number:	TL45L-Pro Wall Washing Series
Track System:	3 wire, 4 wire, 6 wire
Input Voltage (v):	220-240V
Dimming:	On/Off, TRIAC, Knob, DALI
Light source:	COB LED
luminaire Lifetime:	50.000h (L80-B10, Ta25°C)
Rotation Angle (degree):	350
Tilting Angle (degree):	90
IP Rating:	20
Working Temperature (°C)	-5 ~ +30
Storage Temperature (°C)	-20 ~ +50
Material:	Aluminium
Fitting Colors:	9016 Sandy White / 9017 Sandy Black



Wall Washing




Double Asymmetric

Packaging information

N.W. lamp (Kg)	0.52
G.W. Carton (Kg)	10
Master carton dimensions(mm)	430x430x390
Quantity per carton(pcs):	16

Beam	Watt	CRI	Luminous	CCT	Code
W	28W	90	2281.1	4000K	TL454L-Pro-28G40-WW
			2152.0	3000K	TL454L-Pro-28G30-WW
			2001.3	2700K	TL454L-Pro-28G27-WW
D	28W	90	2132.8	4000K	TL454L-Pro-28G40-DA
			2012.1	3000K	TL454L-Pro-28G30-DA
			1871.2	2700K	TL454L-Pro-28G27-DA

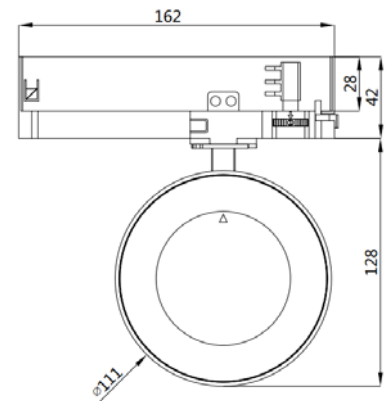

Code composition: TL45 X L - Pro - X 28 G30 - B WW

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Code	② Track	③ Dimensions	④ Series	⑤ Dimming type	⑥ Watt	⑦ LED Kelvin & CRI	⑧ Finishes	⑨ Optical angle
TL45	6 Wire	L	Pro	X Not-Driver	28W	H27 2700 >95	White	WW Wall Washing
	4 Wire			T TRIAC		G30 3000 >90	Black	DA Double Asymmetric
	3 Wire			K Knob		G40 4000 >90		
				D DALI		E50 5000 >80		