

Recessed Downlight

Norms: EN 60598-1, EN 60598-2-1, EN60598-2-2

Product information



Product number:	ALRP45 - 11
Input Voltage (v):	220-240V AC
Dimming:	On/Off, Triac, 1-10V, DALI
Light source:	COB LED
Luminaire Lifetime:	50.000h (L80-B10, Ta25° C)
Rotation Angle (degree):	N/A
Tilting Angle (degree):	N/A
IP Rating:	20
Working Temperature (° C)	-5 ~ +30
Storage Temperature (° C)	-20 ~ +50
Material:	Aluminium
Fitting Colors:	9016 Sandy White / 9017 Sandy Black



Packaging information


N.W. lamp (Kg):	0.43
G.W. Carton (Kg):	16
Master carton dimensions(mm):	520x420x365
Quantity per carton(PCS):	32



Honeycomb Oval diffuser
Diffuser

Beam	Watt	CRI	Luminous	CCT	Code
14	11W	90	532.7 lm	4000K	ALRP45S-02NC11G40-S
			502.5 lm	3000K	ALRP45S-02NC11G30-S
			467.3 lm	2700K	ALRP45S-02NC11G27-S
19	11W	90	568.4 lm	4000K	ALRP45S-02NC11G40-M
			536.2 lm	3000K	ALRP45S-02NC11G30-M
			498.7 lm	2700K	ALRP45S-02NC11G27-M
27	11W	90	597.7 lm	4000K	ALRP45S-02NC11G40-F
			563.9 lm	3000K	ALRP45S-02NC11G30-F
			524.4 lm	2700K	ALRP45S-02NC11G27-F
55	11W	90	506.5 lm	4000K	ALRP45S-02NC11G40-WF
			477.8 lm	3000K	ALRP45S-02NC11G30-WF
			444.3 lm	2700K	ALRP45S-02NC11G27-WF

Cut hole ϕ 45mm

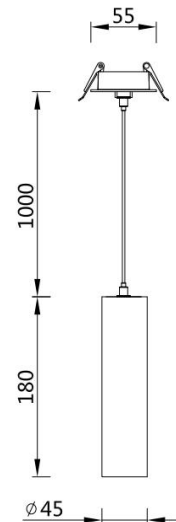

- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

Code composition: ALRP 45 S - 02 N C 11 G30 - S - B - L01

① Product series ② Model ③ App types ④ Track style&length ⑤ Dimming type ⑥ COB type ⑦ Watt ⑧ LED Kelvin & CRI ⑨ Optical angle ⑩ Finishes ⑪ Accessories

ALRP	45	S	Spotlight	02	180mm	N	No dimming	C	COB	11W	H27	2700	>95	S	Spot	White	L01	Honeycomb
				03	300mm	T	Triac dimming				G30	3000	>90	M	Medium	Black	L02	Oval diffuser
				05	500mm	V	1-10V dimming				E40	4000	>80	F	Flood		L03	Diffuser
						D	DALI dimming				C50	5000	>70	WF	Wide Flood			