


Product information



Product number:	TL45S-Pro Wall Washing Series
Track System:	3 wire, 4 wire, 6 wire
Input Voltage (v):	220-240V
Dimming:	On/Off, TRIAC, Knob, DALI
Light source:	COB LED
luminaire Lifetime:	50.000h (L80-B10, Ta25°C)
Rotation Angle (degree):	350
Tilting Angle (degree):	90
IP Rating:	20
Working Temperature (°C)	-5 ~ +30
Storage Temperature (°C)	-20 ~ +50
Material:	Aluminium
Fitting Colors:	9016 Sandy White / 9017 Sandy Black

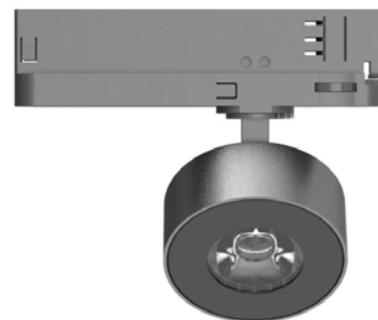

Wall Washing




Double Asymmetric

Packaging information

N.W. lamp (Kg)	0.30
G.W. Carton (Kg)	11
Master carton dimensions(mm)	515x415x305
Quantity per carton(pcs):	24

Beam	Watt	CRI	Luminous	CCT	Code
W	15W	90	1166.8	4000K	TL454S-Pro-15G40-WW
			1100.8	3000K	TL454S-Pro-15G30-WW
			1023.7	2700K	TL454S-Pro-15G27-WW
D	15W	90	1183.4	4000K	TL454S-Pro-15G40-DA
			1116.5	3000K	TL454S-Pro-15G30-DA
			1038.3	2700K	TL454S-Pro-15G27-DA

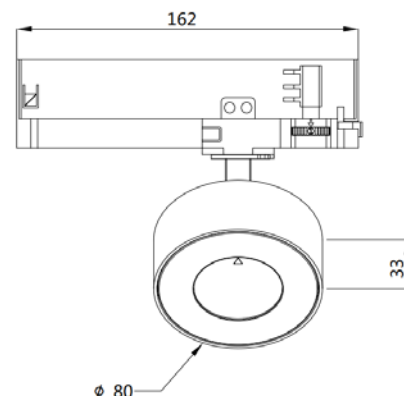

Code composition: TL45 X S - Pro - X 15 G30 - B WW

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Code	② Track	③ Dimensions	④ Series	⑤ Dimming type	⑥ Watt	⑦ LED Kelvin & CRI	⑧ Finishes	⑨ Optical angle
TL45	6 Wire	S	Pro	X Not-Driver	15W	H27 2700 >95	White	WW Wall Washing
	4 Wire			T TRIAC		G30 3000 >90	Black	DA Double Asymmetric
	3 Wire			K Knob		G40 4000 >90		
				D DALI		E50 5000 >80		